


Slim Swimming Pool Lights




型号/Model: FD110
输入电压/Input voltage: DC 12V

型号/Model: FA110
输入电压/Input voltage: AC 12V

产品尺寸
(Product size)

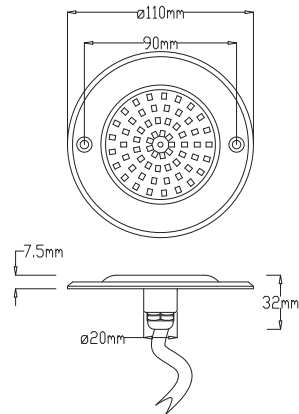


安装指引图
(Installation guide drawing)

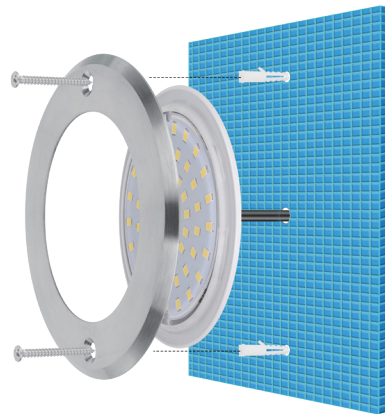

遥控器
(Remote control)



产品尺寸
(Product size)

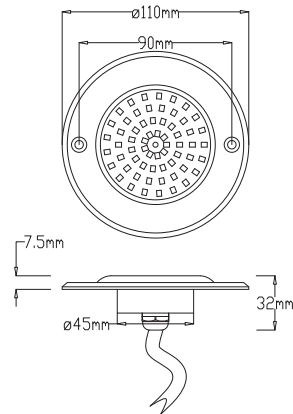


Slim Swimming Pool Lights




型号/Model: FD160
输入电压/Input voltage: DC 12V

型号/Model: FA160
输入电压/Input voltage: AC 12V

产品尺寸
(Product size)

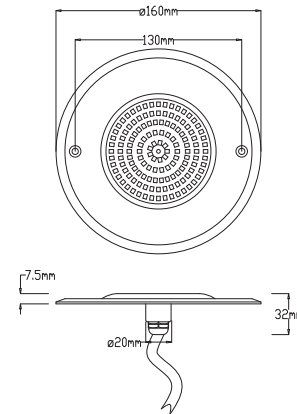


安装指引图
(Installation guide drawing)

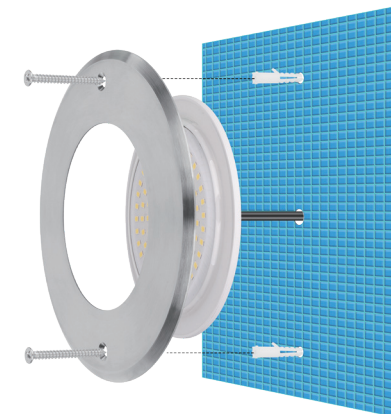

遥控器
(Remote control)



产品尺寸
(Product size)

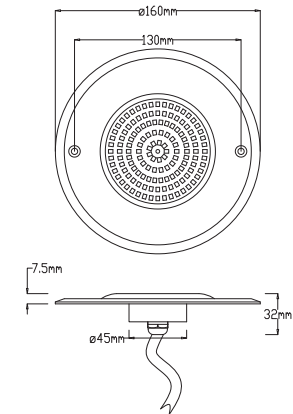

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料+SUS316不锈钢面板 Resin filling/ABS Plastic+SUS316 Stainless steel panel	6Watt	白光/暖白光/绿色/蓝色/RGB Cool White/Warm White/Green/Blue/RGB	1、DC 12V--4针电缆RGB需连接外部控制器控制。 2、AC 12V--2针电缆RGB自带预设15种变色模式,可通过电源开/关或者18键无线遥控器进行控制。 1. DC 12v--4-pin cable RGB needs to be connected to an external controller for control. 2. AC 12V -- 2-pin cable RGB has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
63pcs SMD2835	100-120°	700Lm冷白 for (Cool White) 650Lm暖白 for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
DC/AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料+SUS316不锈钢面板 Resin filling/ABS Plastic+SUS316 Stainless steel panel	10Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	1、DC 12V--4针电缆RGB或5针电缆RGBW需连接外部控制器控制 2、AC 12V--2针电缆RGB或RGBW自带预设15种变色模式,可通过电源开/关或者18键无线遥控器进行控制 1. DC 12V -- 4-pin cable RGB or 5-pin cable RGBW needs to be connected to an external controller for control 2. AC 12V -- 2-pin cable RGB or RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
108pcs SMD2835	100-120°	1100Lm冷白 for (Cool White) 1000Lm暖白 for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
DC/AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

Slim Swimming Pool Lights



型号/Model: FD230
输入电压/Input voltage: DC 12V





型号/Model: FA230
输入电压/Input voltage: AC 12V

产品尺寸
(Product size)

安装指引图
(Installation guide drawing)

遥控器
(Remote control)

产品尺寸
(Product size)

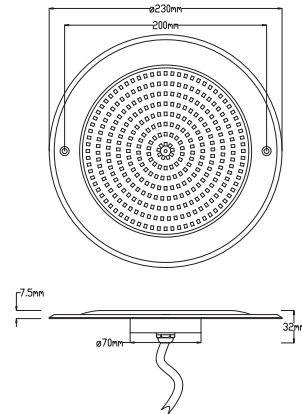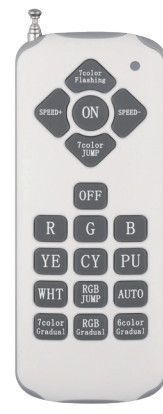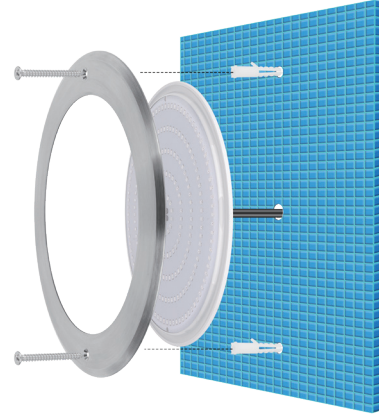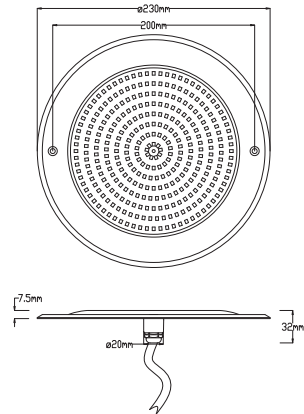

Slim Swimming Pool Lights



型号/Model: FD280
输入电压/Input voltage: DC 12V




型号/Model: FA280
输入电压/Input voltage: AC 12V

产品尺寸
(Product size)

安装指引图
(Installation guide drawing)

遥控器
(Remote control)

产品尺寸
(Product size)

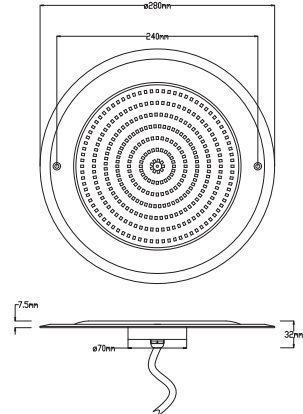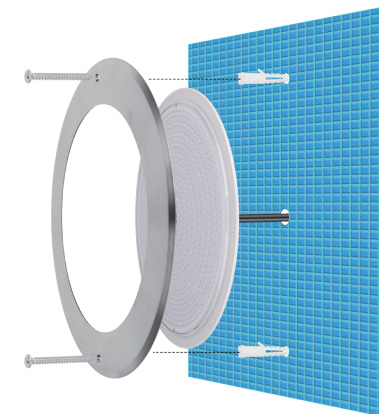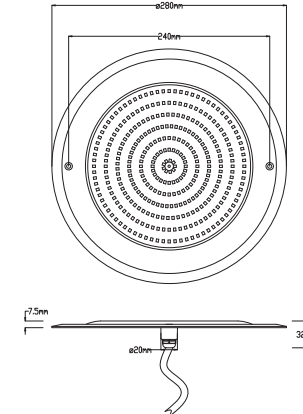

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料+SUS316不锈钢面板 Resin filling/ABS Plastic+SUS316 Stainless steel panel	18Watt/25Watt/35Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	1. DC 12V--4针电缆RGB或5针电缆RGBW需连接外部控制器控制。 2. AC 12V--2针电缆RGB或RGBW自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	1. DC 12V -- 4-pin cable RGB or 5-pin cable RGBW needs to be connected to an external controller for control. 2. AC 12V -- 2-pin cable RGB or RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 25Watt 432pcs SMD2835 for 35Watt	100-120°	2100Lm冷白 for 18Watt (Cool White) 2500Lm冷白 for 25Watt (Cool White) 3500Lm冷白 for 35Watt (Cool White) 2000Lm暖白 for 18Watt (Warm White) 2400Lm暖白 for 25Watt (Warm White) 3400Lm暖白 for 35Watt (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
DC/AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料+SUS316不锈钢面板 Resin filling/ABS Plastic+SUS316 Stainless steel panel	25Watt/35Watt/42Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	1. DC 12V--4针电缆RGB或5针电缆RGBW需连接外部控制器控制。 2. AC 12V--2针电缆RGB或RGBW自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	1. DC 12V -- 4-pin cable RGB or 5-pin cable RGBW needs to be connected to an external controller for control. 2. AC 12V -- 2-pin cable RGB or RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
324pcs SMD2835 for 25Watt 432pcs SMD2835 for 35Watt 540pcs SMD2835 for 42Watt	100-120°	2500Lm冷白 for 25Watt (Cool White) 3500Lm冷白 for 35Watt (Cool White) 4200Lm冷白 for 42Watt (Cool White) 2400Lm暖白 for 25Watt (Warm White) 3400Lm暖白 for 35Watt (Warm White) 4100Lm暖白 for 42Watt (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
DC/AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

Slim Swimming Pool Lights




型号/Model: YD120
输入电压/Input voltage: DC 12V




Slim Swimming Pool Lights




型号/Model: YD230
输入电压/Input voltage: DC 12V

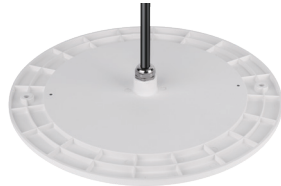


产品尺寸
(Product size)

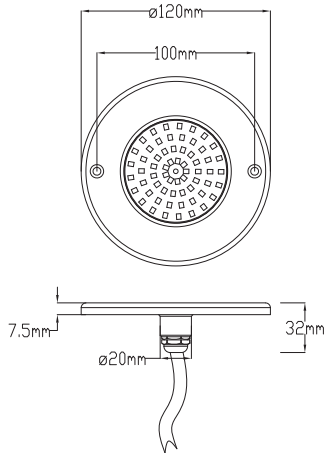


安装指引图
(Installation guide drawing)

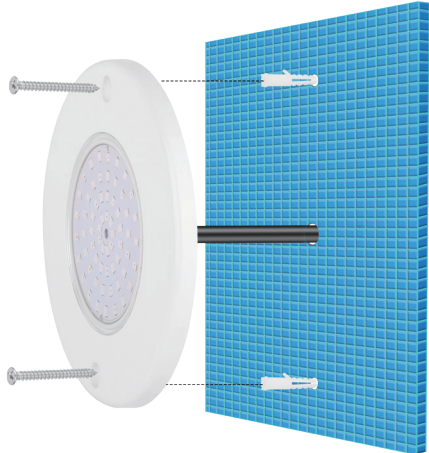


接线示意图
(Wiring diagram)

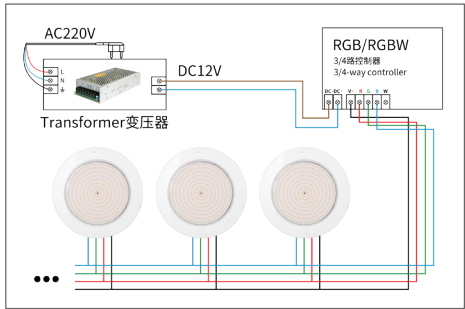


产品尺寸
(Product size)

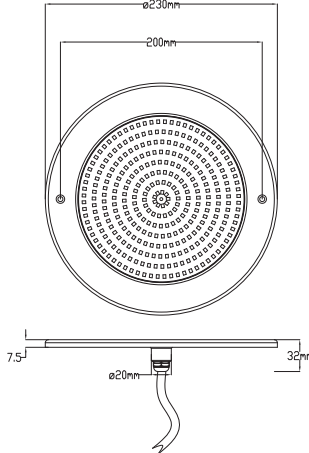

安装指引图
(Installation guide drawing)

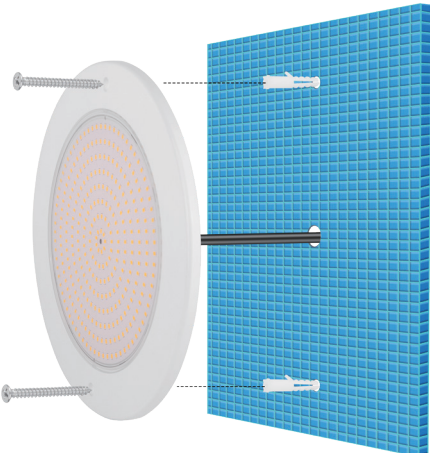

接线示意图
(Wiring diagram)

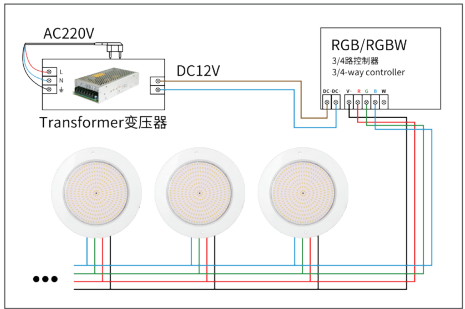

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	6Watt	白光/暖白光/绿色/蓝色/RGB Cool White/Warm White/Green/Blue/RGB	4针电缆RGB需连接外部控制器控制 4-pin cable RGB needs to be connected to an external controller for control
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
63pcs SMD2835	100-120°	600Lm冷白 for (Cool White) 550Lm暖白 for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
DC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	18Watt/25Watt/35Watt	白光/暖白光/绿色/蓝色/RGB Cool White/Warm White/Green/Blue/RGB	4针电缆RGB需连接外部控制器控制 4-pin cable RGB needs to be connected to an external controller for control
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 25Watt 432pcs SMD2835 for 35Watt	100-120°	1800Lm冷白 for 18Watt (Cool White) 1700Lm暖白 for 18Watt (Warm White) 2500Lm冷白 for 25Watt (Cool White) 2400Lm暖白 for 25Watt (Warm White) 3500Lm冷白 for 35Watt (Cool White) 3400Lm暖白 for 35Watt (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
DC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

Resin Filled Wall Mounted Pool Lights



型号/Model: B152
输入电压/Input voltage: AC 12V




Resin Filled Wall Mounted Pool Lights



型号/Model: B180
输入电压/Input voltage: AC 12V



产品尺寸
(Product size)

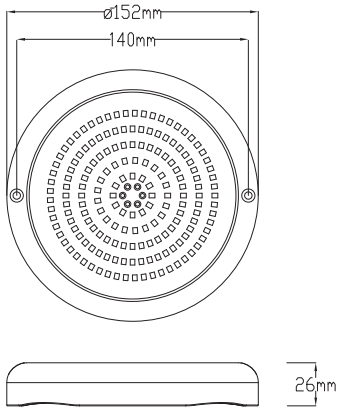


安装指引图
(Installation guide drawing)



遥控器
(Remote control)



产品尺寸
(Product size)

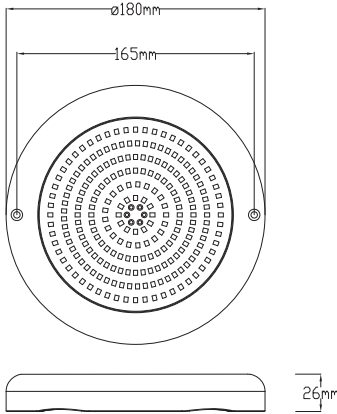

安装指引图
(Installation guide drawing)



遥控器
(Remote control)



产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	10Watt/18Watt	白光/暖白光/绿色/蓝色/RGB Cool White/Warm White/Green/Blue/RGB	2针电缆RGB自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。 2-pin cable RGB has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
135pcs SMD2835 for 10Watt 252pcs SMD2835 for 18Watt	100-120°	1200Lm冷白10Watt for (Cool White) 1100Lm暖白10Watt for (Warm White) 2300Lm冷白18Watt for (Cool White) 2200Lm暖白18Watt for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	18Watt/24Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	2针电缆RGB或RGBW自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。 2-pin cable RGB or RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 24Watt	100-120°	2200Lm冷白18Watt for (Cool White) 2100Lm暖白18Watt for (Warm White) 2700Lm冷白24Watt for (Cool White) 2600Lm暖白24Watt for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	


Resin Filled Wall Mounted Pool Lights



型号/Model: B230
输入电压/Input voltage: AC 12V



产品尺寸
(Product size)

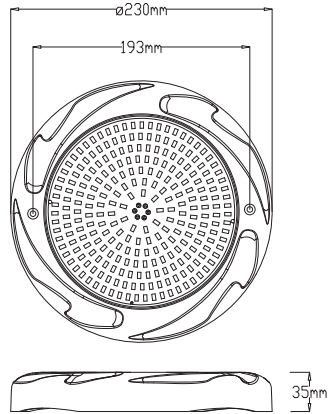

安装指引图
(Installation guide drawing)



遥控器
(Remote control)




Resin Filled Wall Mounted Pool Lights




型号/Model: B260
输入电压/Input voltage: AC 12V



产品尺寸
(Product size)

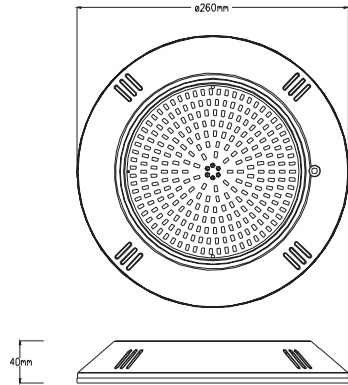

安装指引图
(Installation guide drawing)

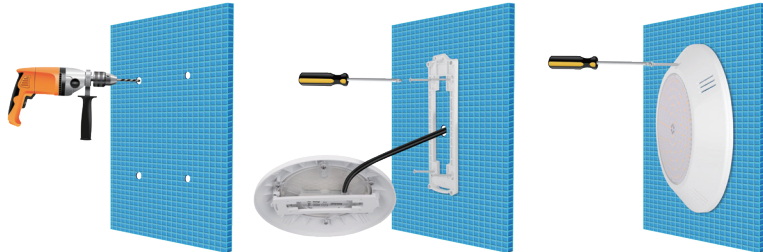

遥控器
(Remote control)



产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	18Watt/24Watt/35Watt/42Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	2针电缆RGB或RGBW自带预设15种 变色模式, 可通过电源开/关或者18键 无线遥控器进行控制。 2-pin cable RGB or RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 24Watt	100-120°	2200Lm冷白18Watt for (Cool White) 2500Lm冷白24Watt for (Cool White) 3400Lm冷白35Watt for (Cool White) 4100Lm冷白42Watt for (Cool White) 2100Lm暖白18Watt for (Warm White) 2400Lm暖白24Watt for (Warm White) 3300Lm暖白35Watt for (Warm White) 4000Lm暖白42Watt for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	18Watt/24Watt/35Watt/42Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	2针电缆RGB或RGBW自带预设15种 变色模式, 可通过电源开/关或者18键 无线遥控器进行控制。 2-pin cable RGB or RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 24Watt	100-120°	2200Lm冷白18Watt for (Cool White) 2500Lm冷白24Watt for (Cool White) 3400Lm冷白35Watt for (Cool White) 4100Lm冷白42Watt for (Cool White) 2100Lm暖白18Watt for (Warm White) 2400Lm暖白24Watt for (Warm White) 3300Lm暖白35Watt for (Warm White) 4000Lm暖白42Watt for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	混凝土游泳池 / Concrete swimming pools	




型号/Model: JA120
输入电压/Input voltage: AC 12V




型号/Model: JA230
输入电压/Input voltage: AC 12V



产品尺寸
(Product size)

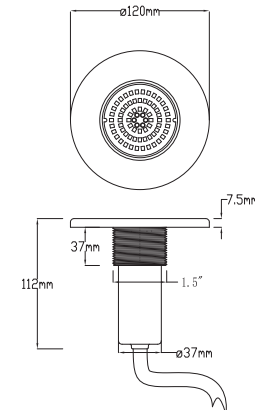


安装指引图
(Installation guide drawing)

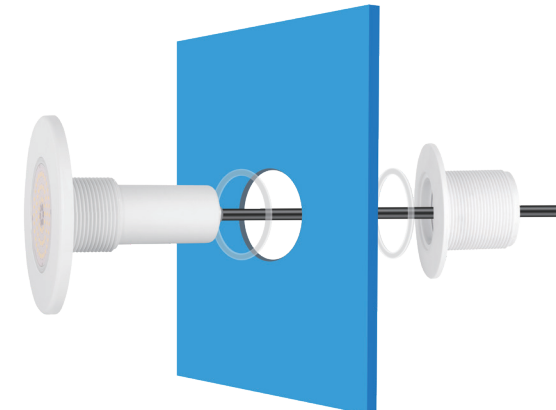


遥控器
(Remote control)



产品尺寸
(Product size)

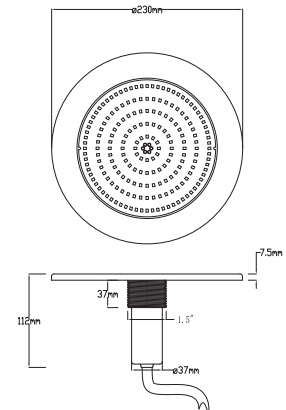

安装指引图
(Installation guide drawing)

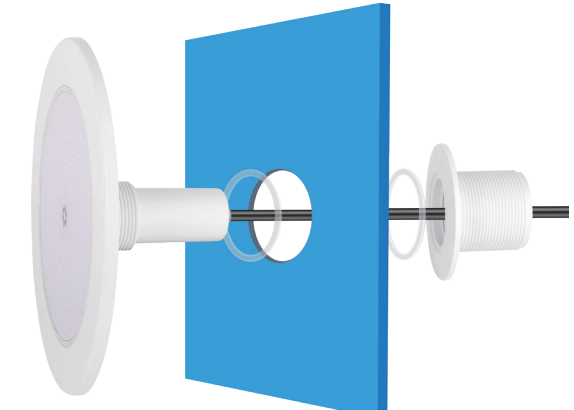

遥控器
(Remote control)



产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	6Watt	白光/暖白光/绿色/蓝色/RGB Cool White/Warm White/Green/Blue/RGB	2针电缆RGB自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
63pcs SMD2835 for 6Watt	100-120°	600Lm冷白6Watt for (Cool White) 550Lm暖白6Watt for (Warm White)	2-pin cable RGB has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	安装方式 / Installation method
-20°~40°	2年 / 2 years	按摩浴缸/玻璃纤维泳池/乙烯基泳池 Jacuzzi / fiberglass pool / Vinyl Pool	拧入式1.5"接头 Screw in 1.5 " connector

产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	18Watt/25Watt/35Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	2针电缆RGB或RGBW自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 25Watt 432pcs SMD2835 for 35Watt	100-120°	2200Lm冷白18Watt for (Cool White) 2100Lm暖白18Watt for (Warm White) 2500Lm冷白25Watt for (Cool White) 2400Lm暖白25Watt for (Warm White) 3400Lm冷白35Watt for (Cool White) 3300Lm暖白35Watt for (Warm White)	2-pin cable RGB/RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	安装方式 / Installation method
-20°~40°	2年 / 2 years	按摩浴缸/玻璃纤维泳池/乙烯基泳池 Jacuzzi / fiberglass pool / Vinyl Pool	拧入式1.5"接头 Screw in 1.5 " connector



型号/Model: PF152
输入电压/Input voltage: AC 12V




型号/Model: PF152SS
输入电压/Input voltage: AC 12V


不锈钢金属面
Stainless steel metal surface



产品尺寸
(Product size)

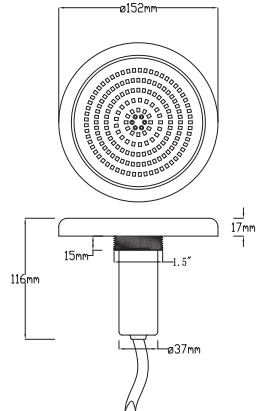

安装指引图
(Installation guide drawing)

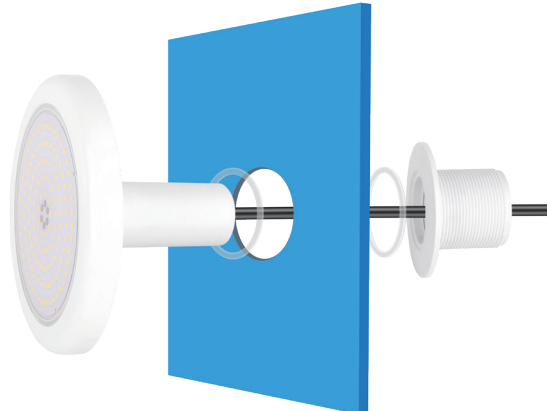


遥控器
(Remote control)




型号/Model: PF180
输入电压/Input voltage: AC 12V



产品尺寸
(Product size)

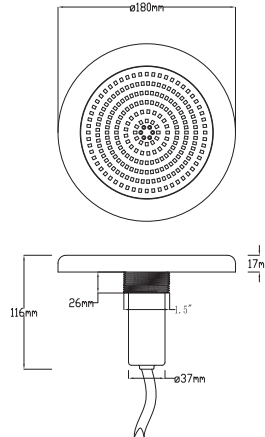

安装指引图
(Installation guide drawing)

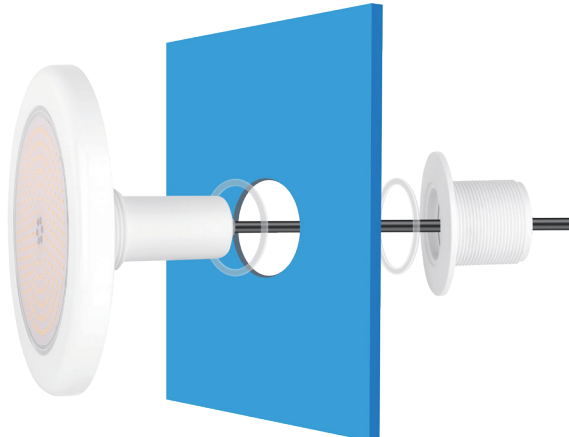

遥控器
(Remote control)



产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	10Watt/18Watt	白光/暖白光/绿色/蓝色/RGB Cool White/Warm White/Green/Blue/RGB	2针电缆RGB自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
135pcs SMD2835 for 10Watt 252pcs SMD2835 for 18Watt	100-120°	1200Lm冷白10Watt for (Cool White) 2200Lm冷白18Watt for (Cool White) 1100Lm暖白10Watt for (Warm White) 2100Lm暖白18Watt for (Warm White)	2-pin cable RGB has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra>80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	安装方式 / Installation method
-20°~40°	2年 / 2 years	按摩浴缸/玻璃纤维泳池/乙烯基泳池 Jacuzzi / fiberglass pool / Vinyl Pool	拧入式1.5"接头 Screw in 1.5" connector


产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	10Watt/18Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	2针电缆RGB或RGBW自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 324pcs SMD2835 for 24Watt	100-120°	2200Lm冷白18Watt for (Cool White) 2400Lm冷白24Watt for (Cool White) 2100Lm暖白18Watt for (Warm White) 2300Lm暖白24Watt for (Warm White)	2-pin cable RGB/RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra>80	
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	安装方式 / Installation method
-20°~40°	2年 / 2 years	按摩浴缸/玻璃纤维泳池/乙烯基泳池 Jacuzzi / fiberglass pool / Vinyl Pool	拧入式1.5"接头 Screw in 1.5" connector

Steel Structure Plastic Film Swimming Pool SPA




2"螺纹转接配件 / 2" Thread adapter fitting

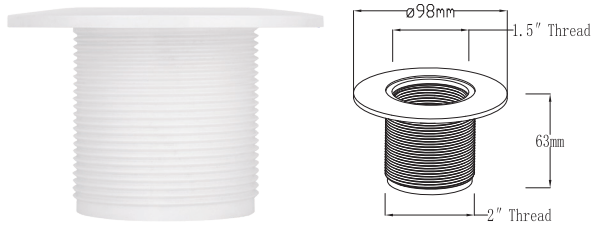


型号/Model: PF230
输入电压/Input voltage: AC 12V



产品尺寸
(Product size)

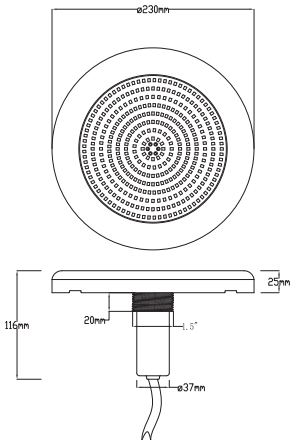

安装指引图
(Installation guide drawing)

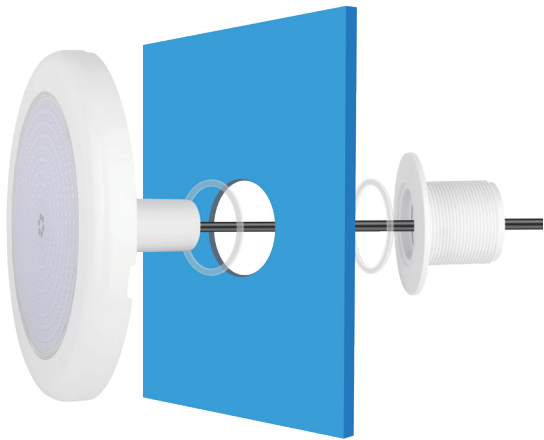

遥控器
(Remote control)



产品描述/Product description:

材料 / Material	功率 / Power	LED颜色 / LED Colour	控制类型 / Control Type
树脂填充/ABS塑料 Resin filling/ABS Plastic	18Watt/25Watt/35Watt/42Watt	白光/暖白光/绿色/蓝色/RGB/RGBW Cool White/Warm White/Green/Blue/RGB/RGBW	2针电缆RGB或RGBW自带预设15种变色模式, 可通过电源开/关或者18键无线遥控器进行控制。 2-pin cable RGB/RGBW has 15 preset color change modes, which can be controlled by power on / off or 18 key wireless remote control.
LED类型 / LED Type	灯光角度 / Light angle	流明 / Illumination	
252pcs SMD2835 for 18Watt 432pcs SMD2835 for 35Watt	100-120°	2200Lm冷白18Watt for (Cool White) 2500Lm冷白25Watt for (Cool White) 3400Lm冷白35Watt for (Cool White) 4100Lm冷白42Watt for (Cool White) 2100Lm暖白18Watt for (Warm White) 2400Lm暖白25Watt for (Warm White) 3300Lm暖白35Watt for (Warm White) 4000Lm暖白42Watt for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
AC 12V	IP68 CE ROHS	Ra≥80	2-针式1.5"接头 Screw in 1.5" connector
工作环境温度 / Working ambient temperature	产品质保 / Product Warranty	应用环境 / Environment	
-20°~40°	2年 / 2 years	按摩浴缸/玻璃纤维泳池/乙烯基泳池 Jacuzzi / fiberglass pool / Vinyl Pool	

Recessed Pool Lights




型号/Model: R6801




安装预埋筒
(Mounting sleeve)



产品尺寸
(Product size)

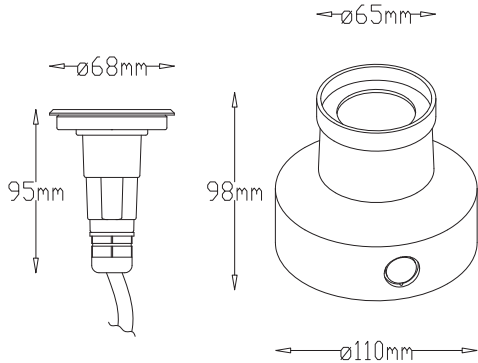

必须保证水进入到预埋筒内浸泡灯具, 防止水会从底部泄露掉
(Water must be allowed to go inside and outside sleeve feely without leaking from the other side)

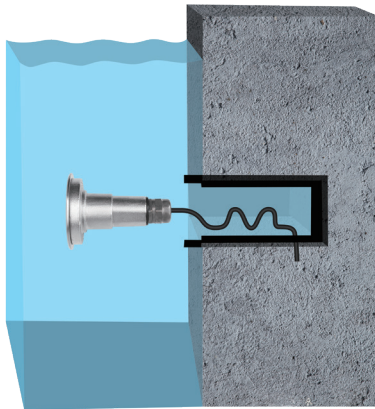

产品描述/Product description:

材料 / Material	安装预埋筒 / Mounting sleeve	LED色温 / LED Colour	驱动程序 / Driver
模具压铸不锈钢316# Molding shabed stainless steel sus 316#	ABS	2200K/2700K/3000K/4000K/6000K/ Red/Gree/Blue/RGB3in1	恒定电流输出 Constant current output 单色=1路输出 Single color=1-Circuit output RGB三合一=3路输出 RGB 3in1 LED=3-Circuit output
LED品牌 / LED Brand	标准功率 / Standard Power	流明 / Illumination	
Edison-1*3W	2.6Watt	180Lm白光 for (Cool White) 160Lm暖白 for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	
直流DC 12-24V	IP68 CE ROHS	Ra≥80	工作环境温度 / Working ambient temperature -20°~40°
出光角度 / Light angle	产品质保 / Product Warranty	应用环境 / Environment	
30°/40°/60° (出厂默认为Factory Default 30°)	2年 / 2 years	嵌入式灯具, 适用于水下领域 Embedded lamp, applicable to underwater field	

Recessed Pool Lights





型号/Model: R11803



安装预埋筒
(Mounting sleeve)

产品尺寸
(Product size)

必须保证水进入到预埋筒内浸泡灯具，防止水会从底部泄露掉
(Water must be allowed to go inside and outside sleeve feely without leaking from the other side)

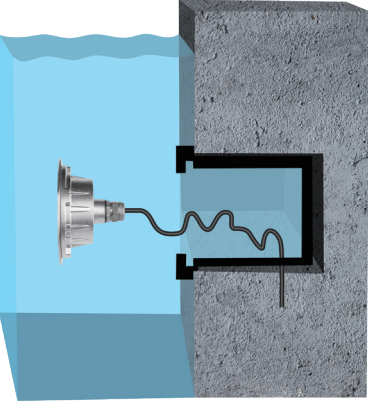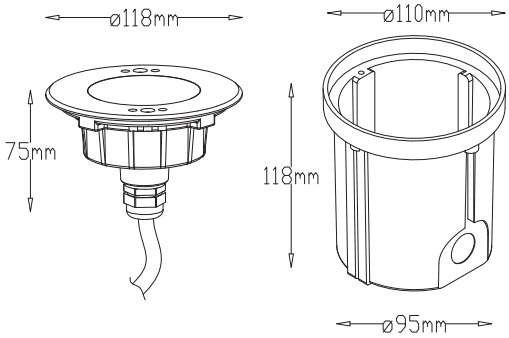

产品描述/Product description:

材料 / Material	安装预埋筒 / Mounting sleeve	LED色温 / LED Colour	驱动程序 / Driver
模具压铸不锈钢316# Molding shabed stainless steel sus 316#	ABS	2200K/2700K/3000K/4000K/6000K/Red/Gree/ Blue/RGB3in1/RGBW4in1	恒定电流输出 Constant current output
LED品牌 / LED Brand	标准功率 / Standard Power	流明 / Illumination	单色=1路输出 Single color=1-Circuit output
CREE-3*3W	7.2Watt	500Lm白光 for (Cool White) 400Lm暖白 for (Warm White)	RGB三合一=3路输出 RGB 3in1 LED=3-Circuit output
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	RGBW四合一=4路输出 RGBW 4in1 LED=4-Circuit output
直流DC 12-24V	IP68 CE ROHS	Ra≥80	
出光角度 / Light angle	产品质保 / Product Warranty	应用环境 / Environment	工作环境温度 / Working ambient temperature
10°/ 15°/30°/40°/60° (出厂默认为Factory Default 30°)	2年 / 2 years	嵌入式灯具, 适用于水下领域 Embedded lamp, applicable to underwater field	-20°~40°

Recessed Pool Lights





型号/Model: R16006



安装预埋筒
(Mounting sleeve)

产品尺寸
(Product size)

必须保证水进入到预埋筒内浸泡灯具，防止水会从底部泄露掉
(Water must be allowed to go inside and outside sleeve feely without leaking from the other side)

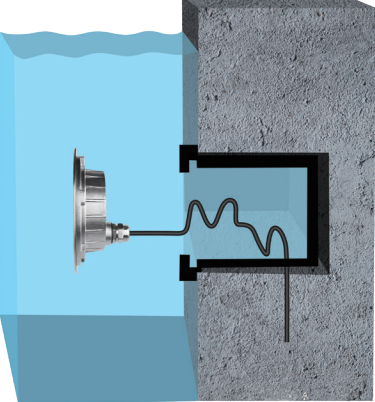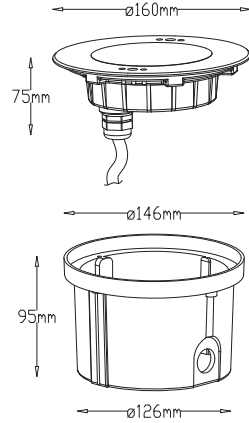

产品描述/Product description:

材料 / Material	安装预埋筒 / Mounting sleeve	LED色温 / LED Colour	驱动程序 / Driver
模具压铸不锈钢316# Molding shabed stainless steel sus 316#	ABS	2200K/2700K/3000K/4000K/6000K/Red/Gree/ Blue/RGB3in1/RGBW4in1	恒定电流输出 Constant current output
LED品牌 / LED Brand	标准功率 / Standard Power	流明 / Illumination	单色=1路输出 Single color=1-Circuit output
CREE-6*3W	14.5Watt	1000Lm白光 for (Cool White) 800Lm暖白 for (Warm White)	RGB三合一=3路输出 RGB 3in1 LED=3-Circuit output
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	RGBW四合一=4路输出 RGBW 4in1 LED=4-Circuit output
直流DC 12-24V	IP68 CE ROHS	Ra≥80	
出光角度 / Light angle	产品质保 / Product Warranty	应用环境 / Environment	工作环境温度 / Working ambient temperature
10°/ 15°/30°/40°/60° (出厂默认为Factory Default 30°)	2年 / 2 years	嵌入式灯具, 适用于水下领域 Embedded lamp, applicable to underwater field	-20°~40°




型号/Model: R16009


安装预埋筒
(Mounting sleeve)



产品尺寸
(Product size)

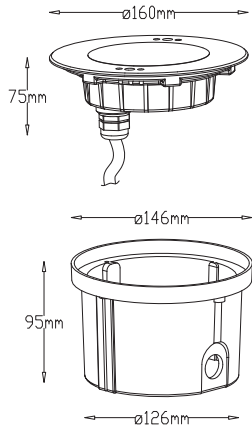

必须保证水进入到预埋筒内浸泡灯具, 防止水会从底部泄露掉
(Water must be allowed to go inside and outside sleeve feely without leaking from the other side)

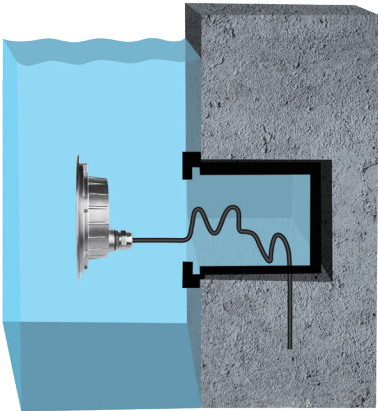

产品描述/Product description:

材料 / Material	安装预埋筒 / Mounting sleeve	LED色温 / LED Colour	驱动程序 / Driver
模具压铸不锈钢316# Molding shabed stainless steel sus 316#	ABS	2200K/2700K/3000K/4000K/6000K/ Red/Gree/Blue/RGB3in1	恒定电流输出 Constant current output 单色=1路输出 Single color=1-Circuit output RGB三合一=3路输出 RGB 3in1 LED=3-Circuit output
LED品牌 / LED Brand	标准功率 / Standard Power	流明 / Illumination	
CREE-9*3W	22Watt	1500Lm白光 for (Cool White) 1200Lm暖白 for (Warm White)	
输入电压 / Input voltage	防护等级 / Protection class	LED显色指数 / LED Color rendering index	工作环境温度 / Working ambient temperature
直流DC 12-24V	IP68 CE ROHS	Ra≥80	
出光角度 / Light angle	产品质保 / Product Warranty	应用环境 / Environment	
10°/ 15°/30°/40°/60° (出厂默认为Factory Default 30°)	2年 / 2 years	嵌入式灯具, 适用于水下领域 Embedded lamp, applicable to underwater field	-20°~40°