


STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com


SP02 4" 50HZ

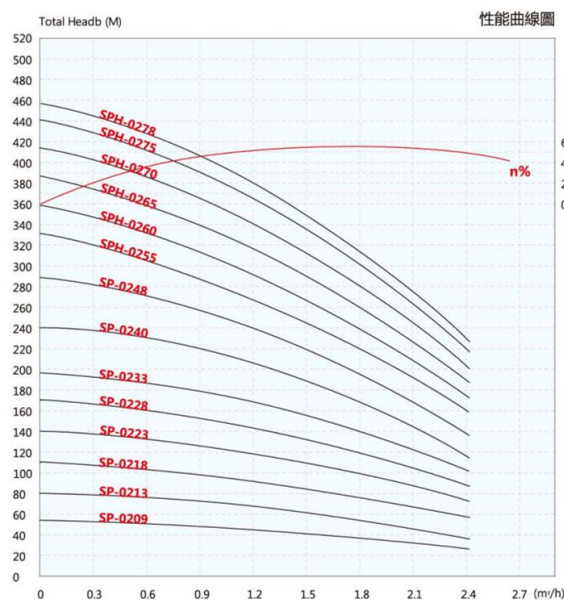

性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	0.9	1.2	1.8	2.1	2.4	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-0209	0.37	1 1/4" 30mm	H(m)	50	48	39	32	23	354	351	596	3.2	11
SP-0213	0.55			70	68	55	47	35	438	366	709	4	12
SP-0218	0.75			100	92	78	65	47	543	386	841	5.1	14
SP-0223	1.1			127	120	100	83	62	648	406	946	6.2	16
SP-0228	1.5			154	148	121	102	77	753	441	1099	7	18
SP-0233	1.5			180	170	141	119	89	858	441	1204	8.1	19
SP-0240	2.2			225	211	176	146	106	1041	501	1449	10.4	24
SP-0248	2.2			267	250	208	172	123	1209	501	1617	11	25
SP-0252	3			290	273	226	189	136	1282	561	1872	11.8	31
SPH-0255	3			308	290	239	199	146	1484	561	2074	15	34
SPH-0260	3			334	316	260	213	158	1589	561	2179	16	35
SPH-0265	3			359	339	279	228	163	1694	561	2284	17.1	36
SPH-0270	4			386	367	301	243	178	1799	601	2451	18.3	39
SPH-0275	4			412	392	322	258	189	1904	601	2556	19.3	40
SPH-0278	4			427	408	334	267	196	1967	601	2619	19.9	41

SP03 4" 50HZ

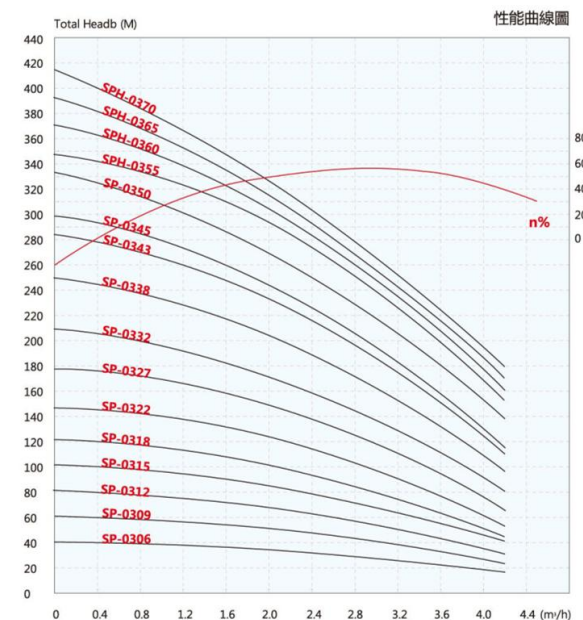


性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	2	2.4	3	3.6	4	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-0306	0.37	1 1/4" 30mm	H(m)	33	30	24	19	14	291	351	533	2.6	11
SP-0309	0.55			47	44	39	30	23	354	366	625	3.1	11
SP-0312	0.75			64	60	51	40	30	417	386	715	3.7	13
SP-0315	1.1			80	75	65	50	39	480	406	778	4.2	14
SP-0318	1.1			95	89	79	58	45	543	406	841	4.9	15
SP-0322	1.5			117	110	96	74	57	627	441	973	5.4	16
SP-0327	2.2			143	134	117	89	67	732	501	1140	6.3	20
SP-0332	2.2			171	160	140	106	80	837	501	1245	7.6	22
SP-0338	3			204	192	173	137	110	988	561	1578	9	28
SP-0343	3			230	218	195	156	129	1093	561	1683	10	29
SP-0345	3			240	227	204	162	133	1146	561	1736	10.8	30
SP-0350	4			270	254	230	183	152	1240	601	1892	11.4	32
SPH-0355	4			297	280	249	203	166	1484	601	2136	15	36
SPH-0360	4			321	306	263	219	180	1589	601	2241	16	37
SPH-0365	5.5			350	331	278	239	196	1694	721	2415	17.1	42
SPH-0370	7.5			377	356	294	258	212	1799	841	2640	18.3	50

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com


SP05 4" 50HZ

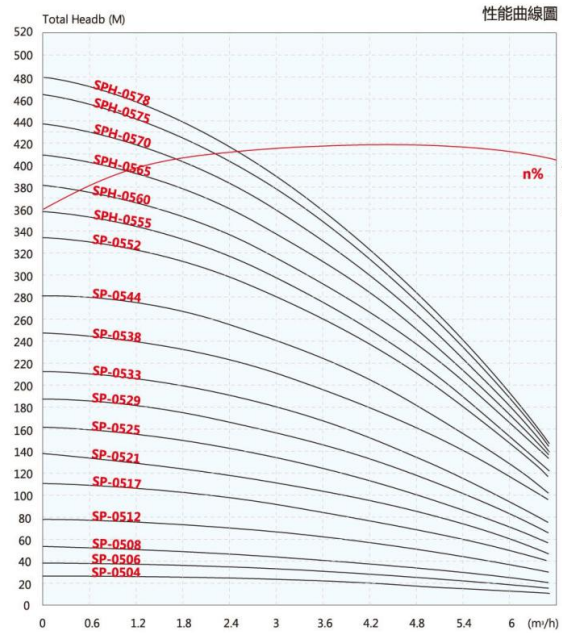

性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	3.0	4.0	5.0	6.0	6.5	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-0504	0.37	1 1/2" 40mm	H(m)	20	19	16	11	9	249	351	491	2.2	10
SP-0506	0.55			32	29	23	18	15	291	366	562	2.3	10
SP-0508	0.75			41	37	33	23	17	333	386	631	2.9	12
SP-0512	1.1			61	57	48	35	28	417	406	715	3.6	14
SP-0517	1.5			89	79	66	50	41	522	441	868	1.7	13
SP-0521	2.2			111	100	82	62	50	606	501	1014	5.3	19
SP-0525	2.2			129	118	99	74	61	690	501	1098	6.4	20
SP-0529	3			149	135	115	84	66	774	561	1364	6.9	26
SP-0533	3			170	152	130	93	74	858	561	1448	7.8	27
SP-0538	4			205	183	158	114	95	988	601	1640	9.7	31
SP-0544	4			227	205	174	128	103	1125	601	1777	11.0	32
SP-0552	5.5			274	246	210	154	124	1293	721	2035	13.0	38
SPH-0555	5.5			291	259	221	163	130	1484	721	2226	15.0	40
SPH-0560	5.5			320	279	239	177	141	1589	721	2331	16.0	41
SPH-0565	7.5			349	300	258	191	151	1694	841	2512	17.1	48
SPH-0570	7.5			377	321	276	205	161	1799	841	2617	18.3	49
SPH-0575	7.5			405	350	296	220	171	1904	841	2722	19.5	51
SPH-0578	7.5			419	385	311	228	177	1967	841	2785	20.2	51

SP08 4" 50HZ

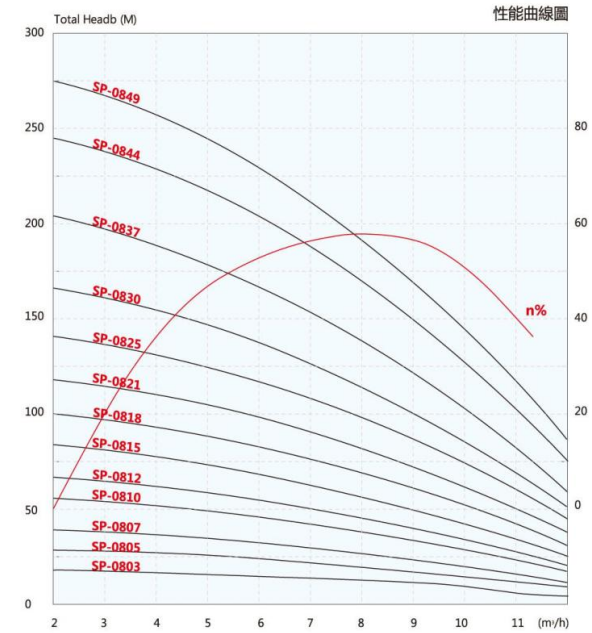


性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	4	6	8	10	11	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-0803	0.55	2" 50mm	H(m)	16	14	12	10	8	327	366	693	3.6	11
SP-0805	0.75			25	22	20	16	13	411	386	709	4.5	14
SP-0807	1.1			36	34	28	22	19	495	406	793	5.4	15
SP-0810	1.5			50	47	40	30	24	621	441	967	6.9	18
SP-0812	2.2			60	57	50	38	30	705	501	1113	7.9	22
SP-0815	2.2			77	68	62	47	38	831	501	1239	9.4	23
SP-0818	3			90	84	75	55	44	957	561	1547	11.1	30
SP-0821	4			110	98	90	65	50	1083	601	1735	12.4	33
SP-0825	4			127	117	104	72	60	1251	601	1903	14.2	35
SP-0830	5.5			150	137	121	90	70	1461	682	2203	16.7	48
SP-0837	5.5			185	167	148	107	83	1755	682	2497	20.2	51
SP-0844	7.5			219	213	176	130	100	2049	715	2867	23.7	58
SP-0849	7.5			246	225	198	138	112	2259	715	3077	26.2	60

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com


SP14 4" 50HZ

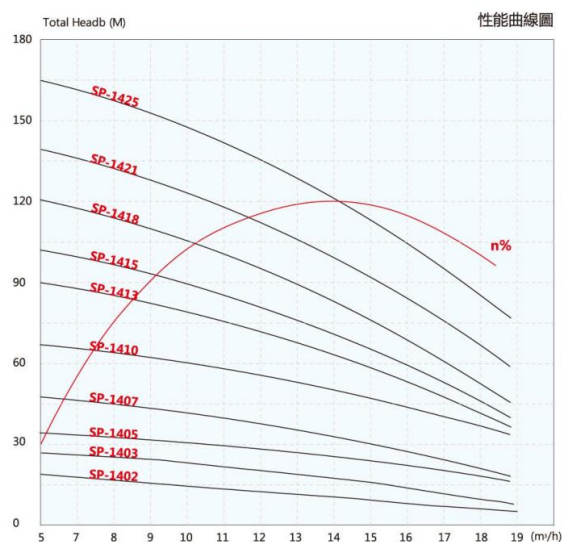

性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	10	12	14	16	18	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-1402	0.75	2" 50mm	H(m)	14	10	8	7	6	308	386	694	3.3	12
SP-1403	1.1			18	15	12	10	8	373	403	776	4	14
SP-1405	1.5			28	26	22	19	14	503	441	849	5.4	16
SP-1407	2.2			40	36	33	27	20	633	501	1041	6.8	21
SP-1410	3			55	53	46	38	28	828	561	1418	7.4	26
SP-1413	4			75	69	60	50	38	1023	601	1675	8.9	30
SP-1415	5.5			89	80	69	58	43	1153	682	1895	9.9	41
SP-1418	5.5			110	96	83	69	53	1348	682	2090	13.7	45
SP-1421	7.5			131	112	97	81	61	1543	715	2361	15.5	50
SP-1425	7.5			159	134	116	97	72	1803	715	2621	17.9	52

SP17 6" 50HZ

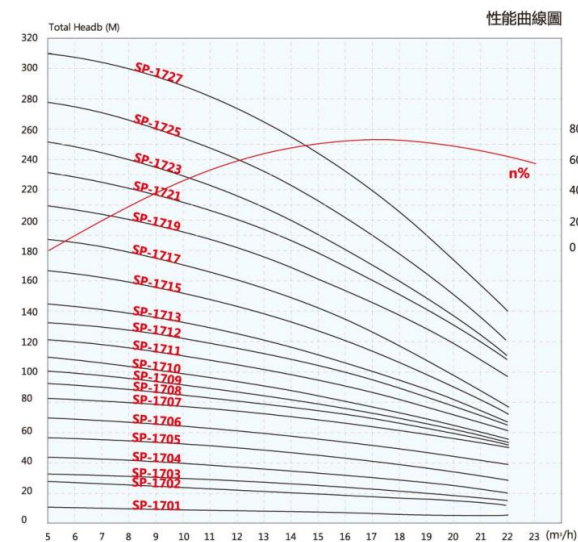


性能參數

泵型號	配用功率 (kW)	出口管徑	Q (m³/h)	12	14	17	20	22	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-1701	0.55	2 1/2" 65mm 3" 80mm	H(m)	13	12	8	7	6	317	366	588	4.6	13
SP-1702	1.1			23	20	18	14	11	377	406	783	5.9	16
SP-1703	2.2			30	28	25	19	15	437	501	845	7.2	21
SP-1704	2.2			39	35	30	25	19	497	501	905	8.5	23
SP-1705	3			47	44	38	32	24	557	561	1147	9.8	29
SP-1706	4			56	53	46	38	29	617	601	1269	11.1	32
SP-1707	4			66	62	55	45	35	677	601	1329	12.4	33
SP-1708	5.5			75	70	63	51	40	733	682	1348	13.7	45
SP-1709	5.5			84	79	71	58	45	797	682	1412	15	46
SP-1710	5.5			93	88	79	64	50	857	682	1472	16.1	47
SP-1711	7.5			104	97	87	70	57	917	715	1562	17.5	52
SP-1712	7.5			113	106	95	76	62	977	715	1622	18.9	53
SP-1713	7.5			126	118	104	86	73	1052	715	1697	20.3	54
SP-1715	9.2			141	133	121	97	78	1172	756	1883	22.9	61
SP-1717	9.2			161	150	134	107	83	1292	756	2003	25.4	63
SP-1719	11			180	168	151	123	96	1412	790	2123	28	70
SP-1721	13			200	188	163	132	106	1532	821	2243	30.5	75
SP-1723	13			216	202	181	145	116	1652	821	2363	33.1	77
SP-1725	15			235	222	196	157	126	1772	870	2549	35.6	97
SP-1727	15			254	239	217	169	136	1892	870	2669	38.2	99

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com


SP30 6" 50HZ

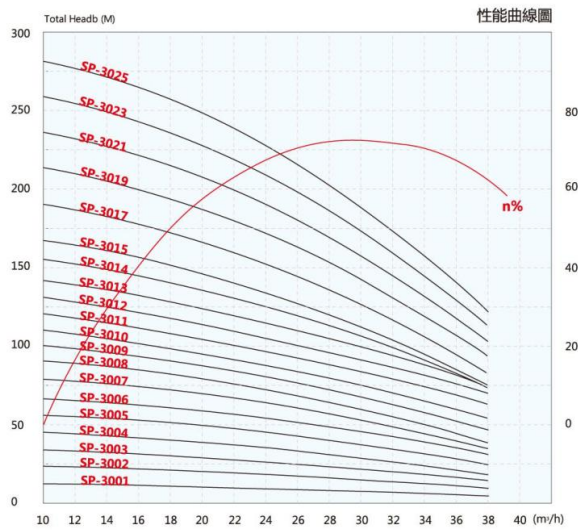

性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	20	24	30	36	38	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-3001	1.1	2 1/2" 65mm 3" 80mm	H(m)	10	9	8	7	6	353	406	651	5.1	15
SP-3002	2.2			19	18	17	11	9	449	501	857	6.8	21
SP-3003	3			29	27	22	15	12	545	561	1135	8.6	28
SP-3004	4			38	35	30	21	18	616	601	1268	9.9	31
SP-3005	5.5			50	45	38	30	27	747	682	1362	11.6	43
SP-3006	5.5			57	53	44	32	27	848	682	1463	14.5	46
SP-3007	7.5			69	64	54	40	34	949	715	1594	15.6	50
SP-3008	7.5			75	70	60	46	38	1040	715	1685	18.2	52
SP-3009	9.2			88	81	68	50	42	1136	756	1847	19.1	57
SP-3010	9.2			95	88	75	55	47	1232	756	1943	20.9	59
SP-3011	9.2			102	93	80	60	51	1328	756	2039	22.7	61
SP-3012	11			109	99	86	65	56	1424	790	2135	24.5	67
SP-3013	11			120	111	96	77	70	1520	790	2231	27.4	69
SP-3014	13			134	123	104	78	58	1616	821	2327	27.9	72
SP-3015	13			140	130	112	84	64	1712	821	2423	31.1	75
SP-3017	15			155	142	128	99	93	1904	870	2681	34.9	96
SP-3019	18.5			174	165	147	104	82	2096	900	2936	36.7	102
SP-3021	18.5			198	182	165	107	94	2288	900	3128	38.5	104
SP-3023	22			221	199	182	109	107	2480	944	3386	40.2	109
SP-3025	22			244	216	199	120	112	2672	944	3578	42.1	111

SP46 6" 50HZ

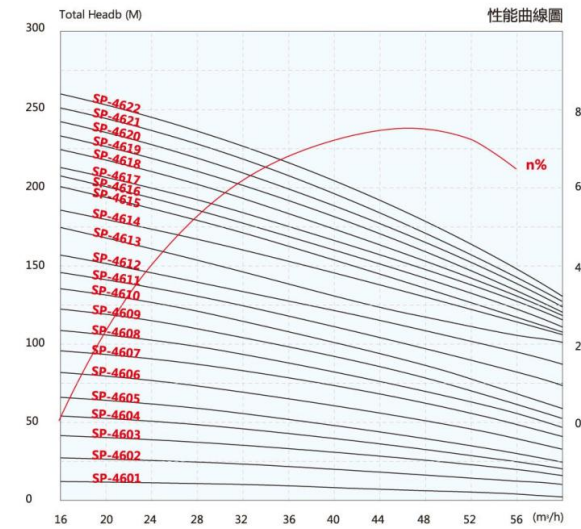


性能參數

泵型號	配用功率 (KW)	出口管徑	Q (m³/h)	20	30	42	50	60	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-4601	2.2	3" 80mm 4" 100mm	H(m)	13	11	9	7	6	391	501	799	6.3	20
SP-4602	3			24	21	16	13	12	504	561	1094	8.5	28
SP-4603	5.5			38	32	27	23	20	617	682	1232	10.7	42
SP-4604	7.5			50	43	37	31	28	730	715	1375	13.0	47
SP-4605	7.5			62	53	45	37	33	858	715	1503	15.2	49
SP-4606	9.2			74	64	54	45	40	971	756	1682	17.4	55
SP-4607	11			87	76	64	53	47	1084	790	1795	19.7	62
SP-4608	13			100	87	74	62	56	1203	821	1914	22.0	66
SP-4609	15			113	99	79	69	60	1314	870	2091	24.3	85
SP-4610	15			126	108	91	76	69	1423	870	2200	26.5	88
SP-4611	18.5			139	121	102	85	78	1536	900	2376	28.8	94
SP-4612	18.5			151	132	110	92	84	1649	900	2489	31.0	96
SP-4613	22			164	143	121	102	93	1762	944	2668	33.2	102
SP-4614	22			176	153	129	107	98	1875	944	2781	35.5	105
SP-4615	22			187	164	139	116	106	1988	944	2894	37.8	107
SP-4616	26			203	177	149	125	114	2101	988	3007	40.1	117
SP-4617	26			216	187	161	135	124	2214	988	3120	42.3	119
SP-4618	30			230	200	171	142	132	2327	1055	3363	44.5	129
SP-4619	30			242	210	181	151	140	2440	1055	3476	46.7	131
SP-4620	30			260	227	195	165	153	2553	1055	3589	48.9	133
SP-4621	37			267	233	198	166	154	2666	1115	4070	51.1	143
SP-4622	37			280	244	208	174	161	2779	1115	4183	53.3	145

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com


SP60 6" 50HZ

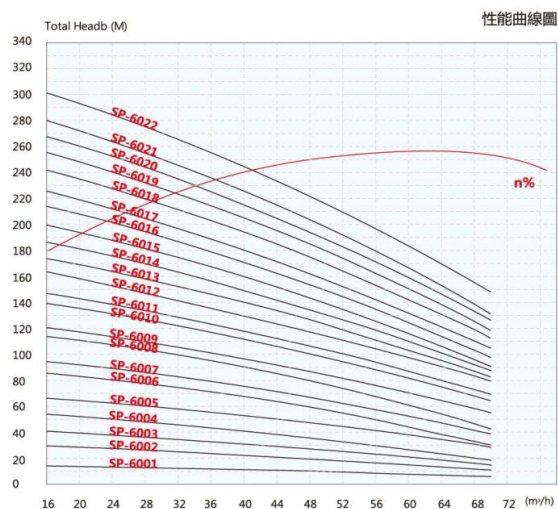

性能參數

泵型號	配用功率 (KW)	出口 管徑	Q (m³/h)	40	50	60	70	75	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
SP-6001	2.2	3" 80mm	H(m)	10	9	8	5	3	391	501	799	6.4	20
SP-6002	4			19	16	14	11	9	504	601	1156	8.7	30
SP-6003	5.5			29	26	21	17	13	617	682	1232	11.0	42
SP-6004	7.5			40	34	30	24	18	745	715	1390	13.2	47
SP-6005	9.2			51	44	37	30	24	873	756	1629	15.4	53
SP-6006	11			66	53	47	37	26	971	790	1682	17.8	60
SP-6007	13			72	63	55	43	32	1084	821	1905	20.1	64
SP-6008	15			83	72	61	50	39	1197	870	1974	22.3	83
SP-6009	18.5			95	83	71	57	44	1314	900	2154	24.6	90
SP-6010	18.5			105	91	78	64	50	1423	900	2263	26.9	92
SP-6011	22	4" 100mm		116	101	83	71	59	1536	944	2442	29.2	98
SP-6012	22			126	110	92	75	58	1649	944	2555	31.4	100
SP-6013	22			138	120	105	84	63	1762	944	2668	33.7	103
SP-6014	26			147	129	110	91	72	1878	988	1878	36.0	113
SP-6015	26			156	137	116	95	74	1988	988	1988	38.2	115
SP-6016	30			169	146	127	102	77	2098	1055	3134	40.4	124
SP-6017	30			179	155	135	109	82	2208	1055	3244	42.6	127
SP-6018	30			189	165	142	115	89	2318	1055	3354	44.8	129
SP-6019	37			200	174	150	122	94	2428	1115	3832	47	139
SP-6020	37			211	183	157	129	100	2538	1115	3942	49.2	141
SP-6021	37	100mm		221	193	165	135	105	2648	1115	4052	51.4	143
SP-6022	45			232	202	173	142	110	2758	1201	4316	53.6	194

SP77 8" 50HZ

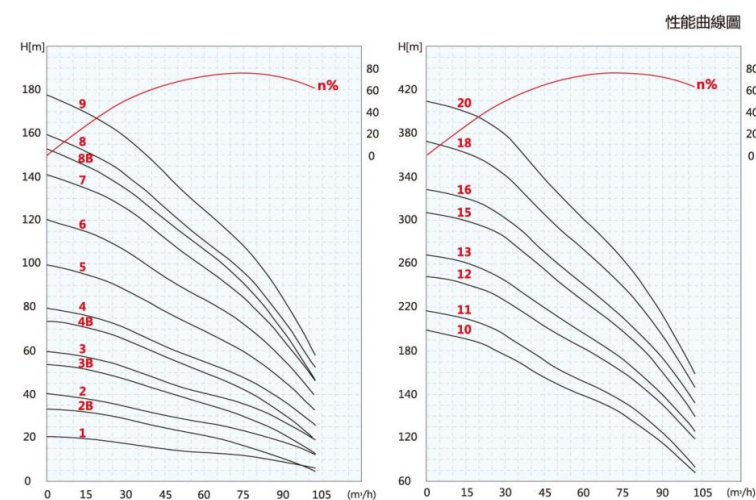


性能參數

外徑	型號	配用功率 (KW)	出口管徑	Q (m³/h)	連接尺寸	66	78	90	102	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
186	SP77-1	5.5	5"	H(m)	6"	13	12	9	7	618	682	1300	25.1	56.0
186	SP77-2-8	5.5			6"	20	16	11	6	746	682	1428	28.7	60.0
186	SP77-2	7.5			6"	26	23	18	13	746	715	1461	28.7	63.0
186	SP77-3-8	9.2			6"	34	28	22	13	874	756	1630	32.3	71.0
186	SP77-3	11			6"	39	35	28	20	874	790	1664	32.3	75.0
186	SP77-4-8	13			6"	47	40	31	20	1003	821	1824	35.9	80.0
186	SP77-4	15			6"	53	46	37	27	1003	870	1873	35.9	97.0
186	SP77-5	18.5			6"	66	57	46	33	1131	900	2031	35.9	101.0
186	SP77-6	22			6"	80	70	56	40	1259	944	2203	43	112.0
186	SP77-7	26			6"	93	81	65	47	1387	988	2375	46.6	124
186	SP77-8-8	26	6"	H(m)	6"	101	87	69	47	1515	988	2503	50.2	128
186	SP77-8	30			6"8"	105	93	75	53	1515	1055	2570	50.2	135
186	SP77-9	30			6"8"	118	104	84	58	1644	1055	2699	53.8	138
186	SP77-10	37			6"8"	132	117	94	68	1772	1115	2887	57.4	150
186	SP77-11	37			6"8"	145	128	104	74	1900	1115	3015	61	153
204	SP77-12	45			6"8"	173	154	130	99	2039	1201	3240	66	206
204	SP77-13	55			8"	187	166	139	107	2168	1286	3454	69.6	222
204	SP77-15	55			8"	215	191	160	120	2424	1286	3710	76.8	229
204	SP77-16	63			8"	228	202	172	132	2552	1341	3893	80.4	241
204	SP77-18	63			8"	260	230	193	147	2809	1341	4150	87.6	248
204	SP77-20	75			8"	287	254	212	159	3065	1391	4456	94.8	285

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com


SP95 8" 50HZ

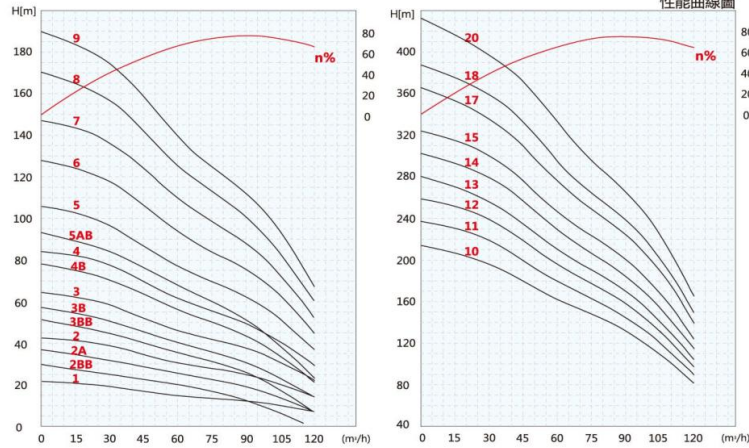

性能參數

外徑	型號	配用功率 (KW)	出口管徑	Q (m³/h)	連接尺寸	84	96	108	120	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
186	SP95-1	5.5	5"	H(m)	6"	13	12	10	8	618	682	1300	25.1	57
186	SP95-2BB	5.5			6"	15	11	5	0	746	682	1428	28.7	60
186	SP95-2A	7.5			6"	21	17	13	8	746	715	1461	28.7	63
186	SP95-2	9.2			6"	26	23	20	15	746	756	1502	28.7	67
186	SP95-3BB	9.2			6"	28	23	16	8	874	756	1630	32.3	71
186	SP95-3B	11			6"	33	28	22	15	874	790	1664	32.3	75
186	SP95-3	13			6"	40	35	30	23	874	821	1695	32.3	77
186	SP95-4B	15			6"	47	40	32	22	1003	870	1873	35.9	97
186	SP95-4	18.5			6"	53	47	39	30	1003	900	1903	35.9	101
186	SP95-5AB	18.5			6"	55	47	36	25	1131	900	2031	39.5	105
186	SP95-5	22			6"	66	59	50	38	1131	944	2075	39.5	109
186	SP95-6	26			6"	79	72	60	46	1259	988	2247	43	120
186	SP95-7	30			6"8"	93	83	70	53	1387	1055	2442	46.6	131
186	SP95-8	37			6"8"	106	95	80	62	1515	1115	2630	50.2	143
186	SP95-9	37			6"8"	118	106	90	68	1644	1115	2759	53.8	146
204	SP95-10	45			6"8"	140	124	105	82	1783	1201	2984	58.8	199
204	SP95-11	55			8"	152	137	116	90	1911	1286	3197	62.4	215
204	SP95-12	55			8"	167	150	126	99	2039	1286	3325	66	218
204	SP95-13	55			8"	180	160	135	106	2168	1341	3509	69.6	230
204	SP95-14	63			8"	194	174	147	116	2296	1391	3687	73.2	264
204	SP95-15	75			8"	210	190	160	126	2424	1391	3815	76.7	267
204	SP95-17	75			8"	235	212	180	140	2680	1391	4071	84	274
204	SP95-18	93			8"	250	227	192	150	2809	1430	4239	87.6	362
204	SP95-20	93			8"	279	251	214	166	3065	1430	4495	94.8A	369

SP125 10" 50HZ

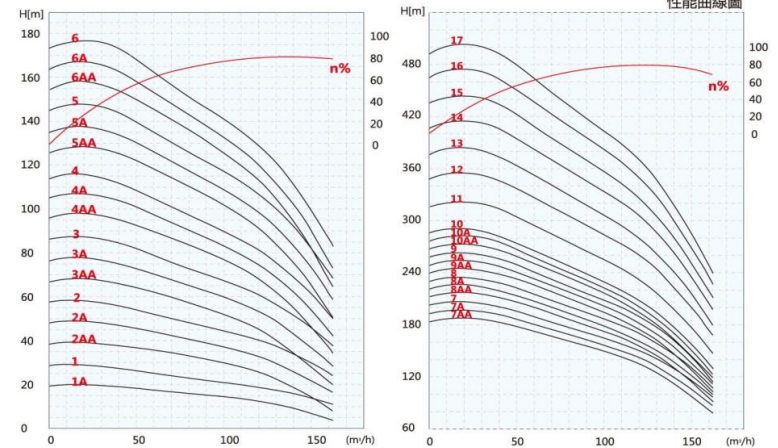


性能參數

外徑	型號	配用功率 (KW)	出口管徑	Q (m³/h)	連接尺寸	114	126	138	150	162	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
218	SP125-1-A	7.5	6"	H(m)	6"	14	12	10	7	4	632	715	1367	29.2	64
218	SP125-1	11			6"	20	18	17	15	12	652	790	1442	29.3	72
218	SP125-2-AA	13			6"	28	24	20	15	9	807	821	1628	35.6	80
218	SP125-2-A	18.5			6"	35	32	28	22	17	807	900	1707	35.7	101
218	SP125-2	22			6"	42	39	35	31	25	807	944	1751	35.8	105
218	SP125-3-AA	22			6"	48	43	36	29	20	963	944	1907	42.1	112
218	SP125-3-A	26			6"	56	51	45	37	29	963	988	1951	42.2	120
218	SP125-3	30			6"8"	63	58	53	46	39	963	1055	2018	42.3	127
218	SP125-4-AA	37			6"8"	72	65	67	47	35	1118	1115	2233	48.6	141
218	SP125-4-A	37			6"8"	78	72	64	54	43	1118	1115	2233	48.7	141
218	SP125-4	37			6"8"	84	78	71	62	51	1118	1115	2233	48.8	141
218	SP125-5-AA	45			6"8"	95	87	78	65	51	1274	1201	2475	55.1	196
218	SP125-5-A	45			6"8"	102	95	85	73	59	1274	1201	2475	55.2	196
218	SP125-5	55			8"	111	103	94	83	69	1274	1286	2560	57.1	210
218	SP125-6-AA	55			8"	118	108	97	82	65	1429	1286	2715	61.9	214
218	SP125-6-A	55			8"	125	116	104	90	74	1429	1286	2715	62	214
227	SP125-6	63			8"	133	124	114	100	84	1429	1341	2770	62.1	223
227	SP125-7-AA	63			8"	140	129	115	98	79	1585	1341	2926	66.9	227
227	SP125-7-A	63			8"	148	137	123	106	83	1585	1341	2926	67	227
227	SP125-7	75			8"10"	155	145	132	116	98	1585	1341	2926	67.1	228
227	SP125-8-AA	75			8"10"	162	149	134	115	93	1740	1391	3131	71.9	262
227	SP125-8-A	75			8"10"	168	156	141	122	100	1740	1391	3131	72	262
227	SP125-8	75			8"10"	176	165	149	130	108	1740	1391	3131	72.1	263
227	SP125-9-AA	93			8"10"	182	168	150	128	104	1896	1430	3326	76.9	351
227	SP125-9-A	93			8"10"	189	175	158	137	113	1896	1430	3326	77	351
227	SP125-9	93			8"10"	196	183	166	145	120	1896	1430	3326	77.1	351
227	SP125-10-AA	93			8"10"	203	186	167	144	115	2051	1430	3481	81.9	356
227	SP125-10-A	93			8"10"	209	193	175	151	123	2051	1430	3481	82	356
227	SP125-10	93			8"10"	215	201	182	159	131	2051	1430	3481	82.1	356
227	SP125-11	110			8"10"	240	223	202	177	149	2207	1510	3717	87.1	386
227	SP125-12	132			10"	269	251	228	200	169	2492	1610	4102	109.5	438
227	SP125-13	132			10"	289	270	246	216	180	2648	1610	4258	116	444
227	SP125-14	147			10"	316	295	269	236	200	2803	1740	4543	122.5	491
227	SP125-15	147			10"	336	315	286	251	213	2959	1740	4699	129	497
227	SP125-16	170			10"	361	338	308	270	227	3114	1820	4934	135.5	538
227	SP125-17	170			10"	382	358	325	286	241	3270	1820	5090	142	544

brown@pudisc.com


SP160
10" 50HZ

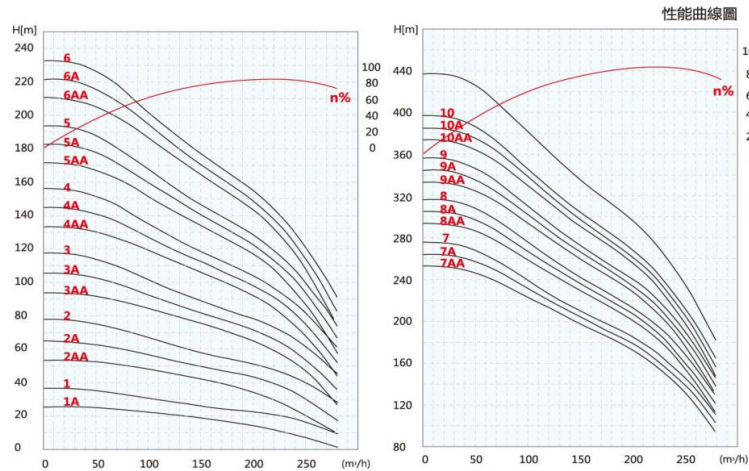

性能參數

外徑	型號	配用功率 (kW)	出口 管徑	Q (m³/h)	連接 尺寸	144	162	180	198	A (mm)	B (mm)	C (mm)	重 量 (kg)	總重 (kg)
218	SP160-1-A	9.2			6"	13	12	8	5	652	756	1408	30.4	69
218	SP160-1	13			6"	20	19	17	14	652	821	1473	30.4	75
218	SP160-2-AA	18.5			6"	29	25	19	12	807	900	1707	36.7	102
218	SP160-2-A	22			6"	35	32	27	20	807	944	1751	36.8	106
218	SP160-2	26			6"	42	38	34	28	807	988	1795	36.8	114
218	SP160-3-AA	30			6"8"	50	45	37	28	963	1055	2018	43.2	128
218	SP160-3-A	37			6"8"	58	52	45	36	963	1115	2078	43.2	136
218	SP160-3	44			6"8"	64	59	43	33	963	1117	2078	43.2	136
227	SP160-4-AA	45			6"8"	75	68	57	45	1118	1201	2319	50.9	191
227	SP160-4-A	45			6"8"	81	74	65	52	1118	1201	2319	51	191
227	SP160-4	55			8"	88	81	73	61	1118	1286	2404	51	210
227	SP160-5-AA	55			8"	97	88	75	60	1274	1286	2560	57.3	210
227	SP160-5-A	55			8"	103	94	82	67	1274	1286	2560	57.4	210
227	SP160-5	63			8"	110	102	90	76	1274	1341	2615	57.4	218
227	SP160-6-AA	63			8"	119	108	93	75	1429	1341	2770	63.7	224
227	SP160-6-A	75			8"10"	125	115	101	83	1429	1391	2820	63.8	234
227	SP160-6	75			8"10"	132	122	108	90	1429	1391	2820	63.8	254
227	SP160-7-AA	75			8"10"	140	128	111	89	1585	1391	2976	70.2	261
227	SP160-7-A	93			8"10"	146	134	117	96	1585	1430	3015	70.2	345
227	SP160-7	93			8"10"	152	140	124	102	1585	1430	3015	70.2	345
227	SP160-8-AA	93			8"10"	160	146	126	102	1740	1430	3170	76.6	351
227	SP160-8-A	93			8"10"	167	152	133	108	1740	1430	3170	76.7	351
227	SP160-8	93			8"10"	172	158	140	115	1740	1430	3170	76.7	351
227	SP160-9-AA	110			8"10"	183	167	146	117	1896	1510	3406	83.1	383
227	SP160-9-A	110			8"10"	189	174	152	124	1896	1510	3406	83.1	383
227	SP160-9	110			8"10"	196	180	159	131	1896	1510	3406	83.1	383
227	SP160-10-AA	110			8"10"	202	184	161	131	2051	1510	3561	89.4	389
247	SP160-10-A	132			10"	216	199	172	145	2181	1610	3791	102.6	431
247	SP160-10	132			10"	223	205	186	152	2181	1610	3791	102.6	431
247	SP160-11	132			10"	243	224	199	165	2337	1610	3947	109	437
247	SP160-12	147			10"	268	248	221	184	2492	1740	4232	115.5	484
247	SP160-13	170			10"	292	269	240	200	2648	1820	4468	121.9	524
247	SP160-14	170			10"	312	288	257	213	2803	1820	4623	128.3	531
247	SP160-15	190			10"	336	311	276	231		1820	1820	128.0	436

SP215
10" 50HZ

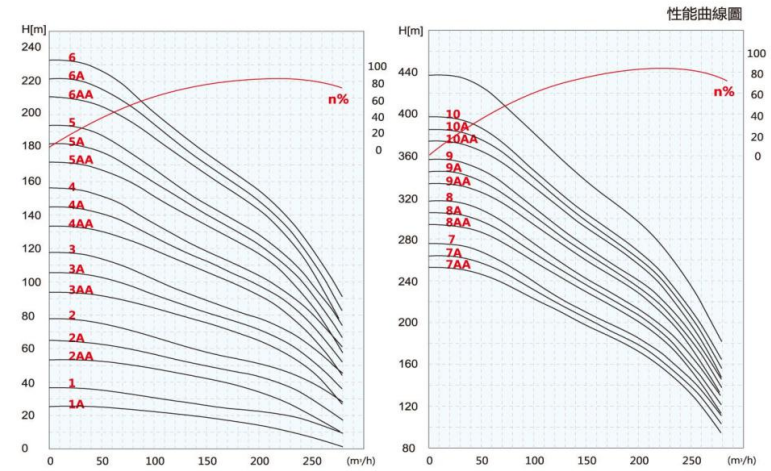

性能參數

外徑	型號	配用功率 (KW)	出口 管徑	Q (m³/h)	連接 尺寸	180	210	240	270	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
241	SP215-1-A	15	6"	H(m)	6"	16	13	9	4	772	870	1642	46.1	108
241	SP215-1	18.5			6"	24	22	18	12	772	900	1672	46.1	112
241	SP215-2-AA	30			6"8"	38	32	24	14	948	1055	2003	56.1	141
241	SP215-2-A	37			6"8"	46	41	34	22	948	1115	2063	56.1	149
241	SP215-2	45			6"8"	54	49	42	32	948	1201	2149	55.8	196
241	SP215-3-AA	55			8"	69	62	51	34	1124	1286	2410	65.6	218
241	SP215-3-A	55			8"	76	69	58	42	1124	1286	2410	65.6	218
241	SP215-3	63			8"	82	76	66	51	1124	1341	2465	65.6	226
241	SP215-4-AA	75			8"10"	98	88	74	53	1300	1391	2691	75.4	266
241	SP215-4-A	75			8"10"	104	94	81	60	1300	1391	2691	75.4	266
241	SP215-4	75			8"10"	110	100	87	68	1300	1391	2691	75.4	266
241	SP215-5-AA	93			8"10"	124	112	94	68	1476	1430	2906	85.8	360
241	SP215-5-A	93			8"10"	130	118	101	76	1476	1430	2906	85.8	360
241	SP215-5	93			8"10"	135	124	107	83	1476	1430	2906	85.8	360
241	SP215-6-AA	110			8"10"	152	138	117	86	1652	1510	3162	96.2	396
241	SP215-6-A	110			8"10"	158	143	123	93	1652	1510	3162	96.2	396
241	SP215-6	110			8"10"	164	149	129	101	1652	1510	3162	96.2	396
274	SP215-7-AA	132			10"	184	167	143	108	1828	1610	3438	111.2	440
274	SP215-7-A	132			10"	189	173	149	116	1828	1610	3438	111.2	440
274	SP215-7	132			10"	196	180	156	124	1828	1610	3438	111.2	440
274	SP215-8-AA	147	10"	213	195	168	128	2004	1740	3744	121.5	490		
274	SP215-8-A	147	10"	219	201	174	136	2004	1740	3744	121.5	490		
274	SP215-8	147	10"	225	207	181	144	2004	1740	3744	121.5	490		
274	SP215-9-AA	170	10"	242	221	191	146	2180	1820	4000	131.7	534		
274	SP215-9-A	170	10"	248	227	197	155	2180	1820	4000	131.7	534		
274	SP215-9	170	10"	254	233	204	162	2180	1820	4000	131.7	534		
	SP215-10-AA	190	12"	271	248	214	172		1820	1820			436	
	SP215-10-A	190	12"	277	254	221	179		1820	1820			436	
	SP215-10	190	12"	283	261	228	182		1820	1820			436	


STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com



STAINLESS STEEL FOUNTAIN PUMP


brown@pudisc.com

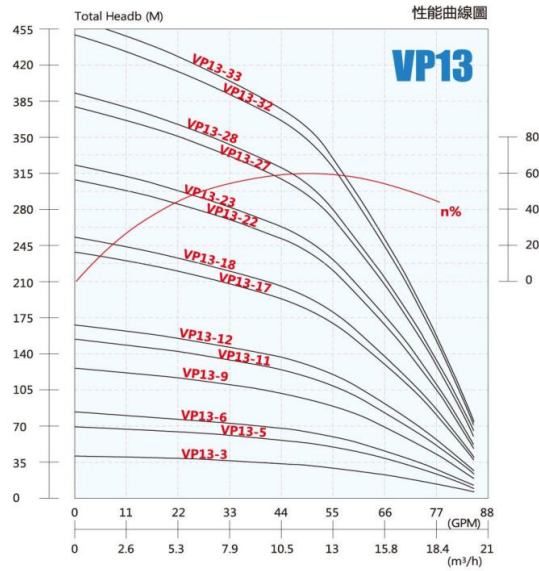

6" 50HZ



6" 50HZ

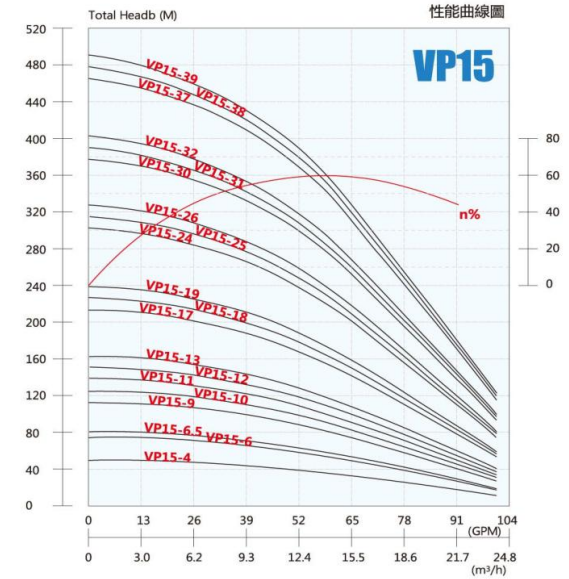

性能參數


泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	5	8	10	13	15	18	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
6"	VP13-3	2"-3"牙口	H(m)	39	37	34	30	23	15	2.2	4"或6"	9.5	396	804
6"	VP13-5	2"-3"牙口		65	62	57	50	38	24	3.7	4"或6"	12	468	1058
6"	VP13-6	2"-3"牙口		77	74	69	60	46	29	3.7	4"或6"	13.2	504	1094
6"	VP13-9	2"-3"牙口		116	111	103	90	69	44	5.5	4"或6"	16.9	612	1227
6"	VP13-11	2"-3"牙口		142	135	126	110	84	54	7.5	6"	19.3	684	1329
6"	VP13-12	2"-3"牙口		155	148	137	120	92	59	7.5	6"	20.6	720	1365
6"	VP13-17	2"-3"牙口		219	209	195	170	130	83	11	6"	26.7	900	1611
6"	VP13-18	2"-3"牙口		232	221	206	180	137	88	11	6"	27.9	936	1647
6"	VP13-22	2"-3"牙口		284	271	252	220	168	108	15	6"	34.3	1148	1925
6"	VP13-23	2"-3"牙口		297	283	263	230	175	112	15	6"	35.5	1184	1961
6"	VP13-27	2"-3"牙口		348	332	309	270	206	132	18.5	6"	40.4	1328	2168
6"	VP13-28	2"-3"牙口		361	344	321	280	214	137	18.5	6"	41.6	1364	2204
6"	VP13-32	2"-3"牙口		416	394	366	320	244	156	22	6"	46.6	1508	2414
6"	VP13-33	2"-3"牙口		426	406	378	330	252	161	22	6"	47.8	1544	2450

性能參數

泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	6	9	12	15	18	21	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
6"	VP15-4	2"-3"牙口	H(m)	47	44	40	34	26	19	2.2	4"或6"	11.2	432	840
6"	VP15-6	2"-3"牙口		71	66	60	50	39	28	3.7	4"或6"	13.8	504	1094
6"	VP15-6.5	2"-3"牙口		77	72	65	55	43	30	3.7	4"或6"	15.2	540	1130
6"	VP15-9	2"-3"牙口		106	99	90	76	59	42	5.5	4"或6"	17.9	612	1227
6"	VP15-10	2"-3"牙口		118	110	100	84	66	46	5.5	4"或6"	19.2	648	1263
6"	VP15-11	2"-3"牙口		130	121	110	92	72	51	7.5	6"	20.5	684	1329
6"	VP15-12	2"-3"牙口		141	132	120	101	79	56	7.5	6"	21.9	720	1365
6"	VP15-13	2"-3"牙口		153	143	130	109	86	60	7.5	6"	23.2	756	1401
6"	VP15-17	2"-3"牙口		200	187	170	143	112	79	11	6"	28.6	900	1611
6"	VP15-18	2"-3"牙口		212	198	180	151	118	83	11	6"	29.9	936	1647
6"	VP15-19	2"-3"牙口		224	210	190	160	125	88	11	6"	31.3	972	1683
6"	VP15-24	2"-3"牙口		283	265	240	202	158	111	15	6"	39.4	1220	1997
6"	VP15-25	2"-3"牙口		295	276	250	210	165	116	15	6"	40.7	1256	2033
6"	VP15-26	2"-3"牙口		307	287	260	218	171	120	15	6"	42	1292	2069
6"	VP15-30	2"-3"牙口		354	331	300	252	197	139	18.5	6"	47.4	1436	2276
6"	VP15-31	2"-3"牙口		365	342	310	260	204	144	18.5	6"	48.7	1472	2312
6"	VP15-32	2"-3"牙口		377	353	320	269	211	148	18.5	6"	50.1	1508	2348
6"	VP15-37	2"-3"牙口		436	408	370	311	243	171	22	6"	56.8	1688	2594
6"	VP15-38	2"-3"牙口		448	419	380	319	250	176	22	6"	58.1	1724	2630
6"	VP15-39	2"-3"牙口		460	430	390	328	257	181	22	6"	59.5	1760	2666

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com

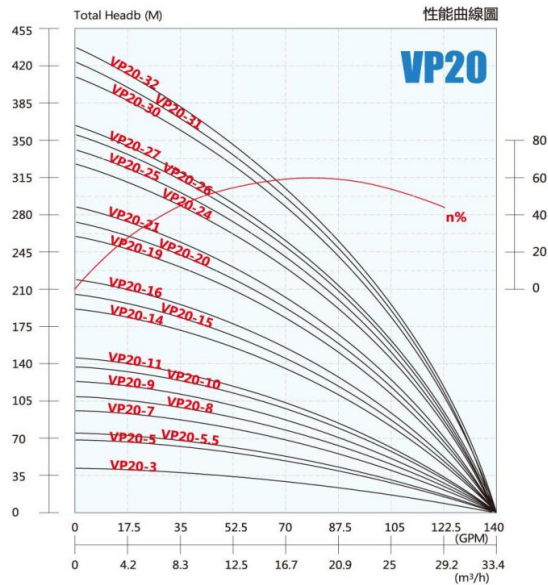6" 50HZ

136cm

A

B

6" 50HZ

136cm

A

B

VP23

性能曲線圖

Total Head (M)

Flow (GPM)

Flow (m³/h)

Efficiency (n%)

性能參數


泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	7	11	14	20	22	25	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
6"	VP20-3	2"-3"牙口	H(m)	37	34	30	26	22	15	2.2	4"或6"	10.1	431	839
6"	VP20-5	2"-3"牙口		62	56	47	43	36	25	3.7	4"或6"	12.9	526	1116
6"	VP20-5.5	2"-3"牙口		68	62	52	48	40	28	3.7	4"或6"	14.3	573	1163
6"	VP20-7	2"-3"牙口		86	79	65	61	50	35	5.5	4"或6"	15.7	621	1236
6"	VP20-8	2"-3"牙口		98	90	74	69	58	40	5.5	4"或6"	17.2	668	1283
6"	VP20-9	2"-3"牙口		110	101	83	78	65	45	7.5	6"	18.6	716	1361
6"	VP20-10	2"-3"牙口		123	112	92	87	72	50	7.5	6"	20	763	1408
6"	VP20-11	2"-3"牙口		135	124	101	95	79	55	7.5	6"	21.4	811	1456
6"	VP20-14	2"-3"牙口		171	157	127	121	101	70	11	6"	25.7	953	1664
6"	VP20-15	2"-3"牙口		183	169	136	130	108	75	11	6"	27.1	1001	1712
6"	VP20-16	2"-3"牙口		195	180	145	139	115	80	11	6"	28.5	1048	1759
6"	VP20-19	2"-3"牙口		232	214	171	165	137	100	15	6"	32.8	1191	1968
6"	VP20-20	2"-3"牙口		244	225	180	173	144	105	15	6"	35.6	1306	2083
6"	VP20-21	2"-3"牙口		256	236	189	182	151	110	15	6"	37	1354	2131
6"	VP20-24	2"-3"牙口		293	270	216	208	173	126	18.5	6"	41.3	1496	2336
6"	VP20-25	2"-3"牙口		305	281	225	217	180	133	18.5	6"	42.7	1544	2384
6"	VP20-26	2"-3"牙口		317	292	234	225	187	140	18.5	6"	44.1	1591	2431
6"	VP20-27	2"-3"牙口		329	303	242	234	195	145	18.5	6"	45.5	1639	2479
6"	VP20-30	2"-3"牙口		366	337	269	260	216	161	22	6"	49.8	1781	2687
6"	VP20-31	2"-3"牙口		378	348	278	268	224	167	22	6"	51.2	1829	2735
6"	VP20-32	2"-3"牙口		390	360	287	277	231	172	22	6"	52.6	1876	2782

性能參數

泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	9	14	18	23	27	32	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
6"	VP23-2	2"-3"牙口	H(m)	28	25	24	19	17	9	2.2	4"或6"	8.7	383	791
6"	VP23-3.5	2"-3"牙口		47	43	41	33	28	15	3.7	4"或6"	11.6	478	1068
6"	VP23-5	2"-3"牙口		67	62	58	47	39	22	5.5	4"或6"	13.1	526	1141
6"	VP23-7	2"-3"牙口		94	87	80	66	53	30	7.5	6"	16	621	1266
6"	VP23-10	2"-3"牙口		134	124	114	95	75	43	11	6"	20.3	763	1474
6"	VP23-11	2"-3"牙口		147	136	125	104	82	48	11	6"	21.8	811	1522
6"	VP23-14	2"-3"牙口		187	174	159	133	104	61	15	6"	26.1	953	1730
6"	VP23-15	2"-3"牙口		200	186	170	142	111	65	15	6"	27.6	1001	1778
6"	VP23-17	2"-3"牙口		227	211	192	161	125	74	18.5	6"	30.5	1096	1936
6"	VP23-18	2"-3"牙口		240	223	204	170	133	78	18.5	6"	31.9	1143	1983
6"	VP23-21	2"-3"牙口		280	260	237	199	154	91	22	6"	37.7	1354	2260
6"	VP23-22	2"-3"牙口		293	273	248	208	161	95	22	6"	39.1	1401	2307
6"	VP23-28	2"-3"牙口		373	347	316	265	205	122	30	6"	47.8	1686	2722
6"	VP23-29	2"-3"牙口		386	360	327	275	212	126	30	6"	49.3	1734	2770

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com

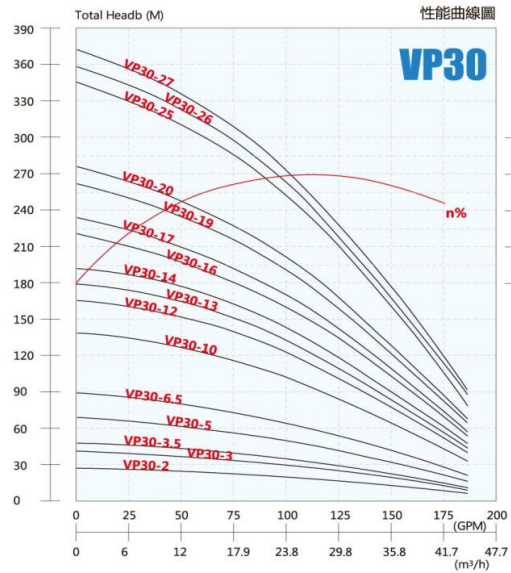

6" 50HZ




8" 50HZ



性能參數

泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	10	16	22	30	33	39	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
6"	VP30-2	2"-3"牙口	H(m)	27	23	21	18	14	10	2.2	4"或6"	9	402	810
6"	VP30-3	2"-3"牙口		40	35	31	26	21	14	3.7	4"或6"	10.6	459	1049
6"	VP30-3.5	2"-3"牙口		46	41	37	31	24	17	3.7	4"或6"	12.2	516	1106
6"	VP30-5	2"-3"牙口		65	58	52	44	35	24	5.5	4"或6"	13.9	573	1188
6"	VP30-6.5	2"-3"牙口		84	76	68	57	45	31	7.5	6"	17.1	687	1332
6"	VP30-10	2"-3"牙口		128	117	104	88	69	48	11	6"	21.9	858	1569
6"	VP30-12	2"-3"牙口		153	140	125	105	83	58	15	6"	25.1	972	1749
6"	VP30-13	2"-3"牙口		165	152	136	114	90	62	15	6"	26.7	1029	1806
6"	VP30-14	2"-3"牙口		178	163	146	123	97	67	15	6"	28.3	1086	1863
6"	VP30-16	2"-3"牙口		203	187	167	140	111	77	18.5	6"	31.6	1200	2040
6"	VP30-17	2"-3"牙口		216	198	177	149	118	82	18.5	6"	33.2	1257	2097
6"	VP30-19	2"-3"牙口		241	222	198	167	131	91	22	6"	36.4	1371	2277
6"	VP30-20	2"-3"牙口		253	233	209	175	138	96	22	6"	39.4	1496	2402
6"	VP30-25	2"-3"牙口		316	292	261	219	173	120	30	6"	47.5	1781	2817
6"	VP30-26	2"-3"牙口		329	303	271	228	180	125	30	6"	49.1	1838	2874
6"	VP30-27	2"-3"牙口		341	315	282	237	187	130	30	6"	50.7	1895	2931

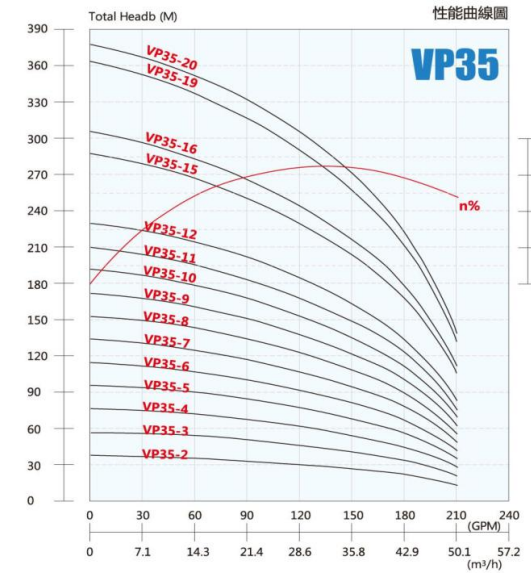


性能參數

泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	14	20	22	35	41	48	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
8"	VP35-2	3"-4"牙口	H(m)	37	36	33	27	22	14	3.7	4"或6"	13.4	431	1021
8"	VP35-3	3"-4"牙口		54	53	48	41	34	22	5.5	4"或6"	16.3	488	1103
8"	VP35-4	3"-4"牙口		72	70	64	54	45	29	7.5	6"	19.2	545	1190
8"	VP35-5	3"-4"牙口		89	87	79	68	56	36	11	6"	22.2	602	1313
8"	VP35-6	3"-4"牙口		107	104	94	82	67	43	11	6"	25.1	659	1370
8"	VP35-7	3"-4"牙口		125	121	110	95	78	50	15	6"	28	716	1493
8"	VP35-8	3"-4"牙口		142	137	125	109	90	58	15	6"	30.9	773	1550
8"	VP35-9	3"-4"牙口		160	154	141	122	101	65	18.5	6"	33.9	830	1670
8"	VP35-10	3"-4"牙口		178	171	156	136	112	72	18.5	6"	36.8	887	1727
8"	VP35-11	3"-4"牙口		196	187	171	150	123	79	22	6"	39.7	944	1850
8"	VP35-12	3"-4"牙口		214	204	187	163	134	86	22	6"	42.7	1001	1907
8"	VP35-15	3"-4"牙口		267	254	233	204	168	108	30	6"	51.5	1172	2208

STAINLESS STEEL FOUNTAIN PUMP


brown@pudisc.com

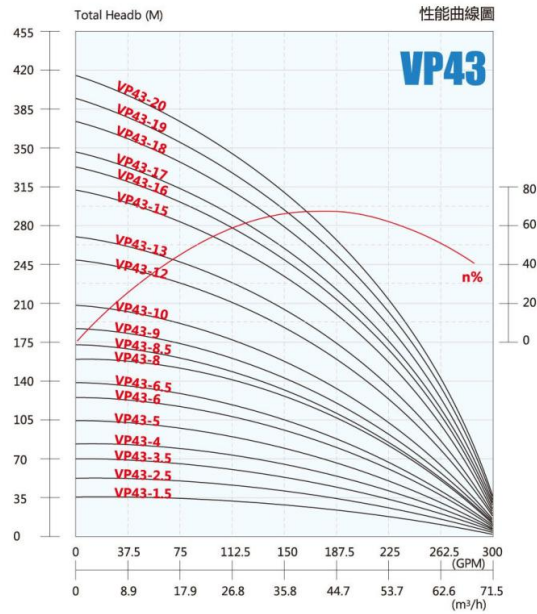

8" 50HZ



8" 50HZ

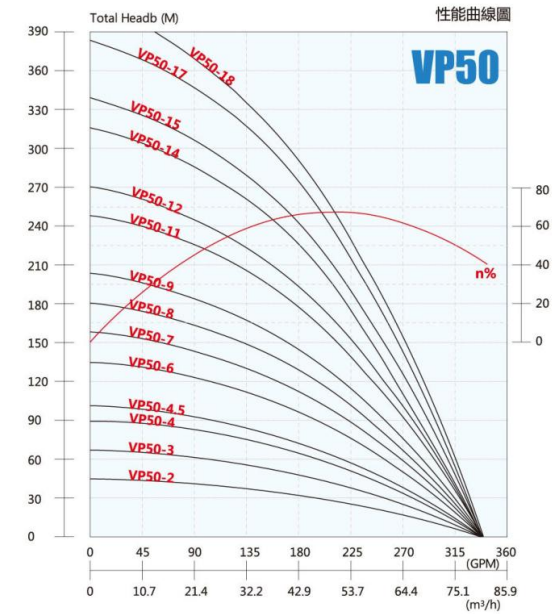

性能參數



泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	15	24	32	43	49	58	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
8"	VP43-1.5	3"-4"牙口	H(m)	36	33	30	24	21	11	3.7	4"或6"	13.4	431	1021
8"	VP43-2.5	3"-4"牙口		52	46	45	35	32	17	5.5	6"	16.3	488	1103
8"	VP43-3.5	3"-4"牙口		70	60	58	45	43	23	7.5	6"	19.3	545	1190
8"	VP43-4	3"-4"牙口		79	70	67	55	48	30	11	6"	20.9	574	1285
8"	VP43-5	3"-4"牙口		98	88	83	69	59	37	11	6"	22.2	602	1313
8"	VP43-6	3"-4"牙口		116	105	99	83	70	45	15	6"	25.1	659	1436
8"	VP43-6.5	3"-4"牙口		132	121	107	90	75	46	15	6"	28.1	716	1493
8"	VP43-8	3"-4"牙口		154	140	131	111	92	60	18.5	6"	31	773	1613
8"	VP43-8.5	3"-4"牙口		164	149	139	118	98	63	18.5	6"	34	830	1670
8"	VP43-9	3"-4"牙口		173	158	147	125	103	67	22	6"	36	858	1764
8"	VP43-10	3"-4"牙口		192	175	162	139	114	75	22	6"	36.9	887	1793
8"	VP43-12	3"-4"牙口		230	210	194	166	136	90	30	6"	42.8	1001	2037
8"	VP43-13	3"-4"牙口		249	228	210	180	147	97	30	6"	45.7	1058	2094
8"	VP43-15	3"-4"牙口		287	263	242	208	169	112	37	6"	54.3	1222	2626

性能參數

泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	18	28	37	50	55	64	負載功率 (KW)	接馬達端 美規	A重量 (KG)	A (mm)	B (mm)
8"	VP50-2	3"-4"牙口	H(m)	46	38	34	29	23	17	5.5	4"或6"	13.7	443	1058
8"	VP50-3	3"-4"牙口		66	58	52	44	34	24	7.5	6"	16.8	506	1151
8"	VP50-4	3"-4"牙口		87	77	69	59	45	31	11	6"	19.9	569	1280
8"	VP50-4.5	3"-4"牙口		97	86	77	66	51	35	11	6"	23	632	1343
8"	VP50-6	3"-4"牙口		129	115	103	88	67	45	15	6"	26.1	695	1472
8"	VP50-7	3"-4"牙口		149	134	121	103	78	52	18.5	6"	29.2	758	1598
8"	VP50-8	3"-4"牙口		170	154	138	117	89	59	22	6"	32.3	821	1727
8"	VP50-9	3"-4"牙口		191	173	155	132	100	66	22	6"	35.4	884	1790
8"	VP50-11	3"-4"牙口		232	211	189	161	122	80	30	6"	41.6	1010	2046
8"	VP50-12	3"-4"牙口		253	230	207	176	133	87	30	6"	44.7	1073	2109
8"	VP50-14	3"-4"牙口		295	269	241	205	155	101	37	6"	50.9	1199	2603
8"	VP50-15	3"-4"牙口		315	288	258	220	166	108	37	6"	56.7	1312	2716

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com

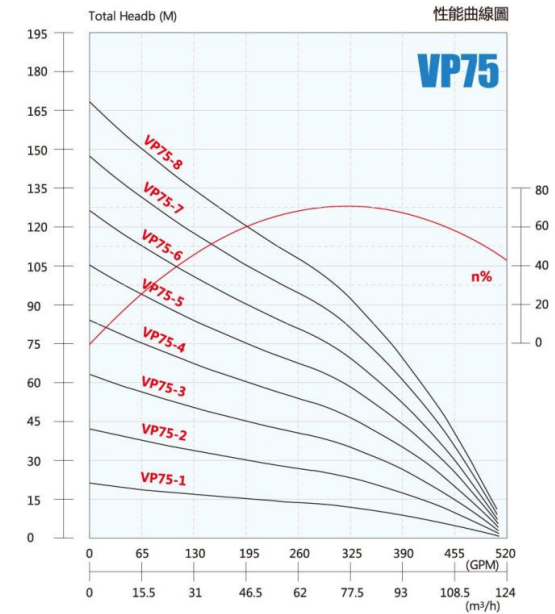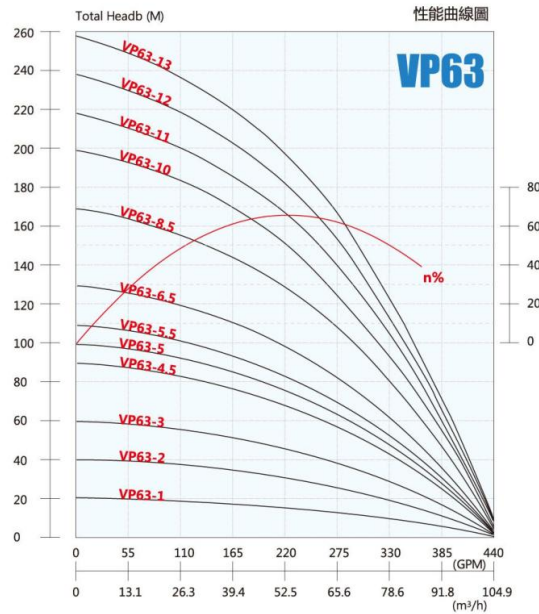

性能參數


泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	23	35	48	63	72	85	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
8"	VP63-1	3"-4"牙口	H(m)	18	17	16	13	14	9	3.7	4"或6"	393	601	983	12.3	33
8"	VP63-2	3"-4"牙口		37	34	31	27	24	13	7.5	6"	469	715	1114	17.1	51
8"	VP63-3	3"-4"牙口		55	52	47	40	34	19	11	6"	545	790	1256	21.9	64
8"	VP63-4.5	3"-4"牙口		83	78	70	60	50	28	15	6"	697	870	1474	31.5	93
8"	VP63-5	3"-4"牙口		92	86	78	67	55	32	18.5	6"	697	900	1537	31.5	97
8"	VP63-5.5	3"-4"牙口		102	95	85	74	60	35	18.5	6"	773	900	1613	36.3	101
8"	VP63-6.5	3"-4"牙口		120	112	101	87	70	41	22	6"	849	944	1755	41.1	110
8"	VP63-8.5	3"-4"牙口		157	146	132	114	90	54	30	6"	1001	1055	2037	50.7	135
8"	VP63-10	3"-4"牙口		185	172	155	134	106	63	37	6"	1077	1115	2481	55.5	148
8"	VP63-11	3"-4"牙口		203	190	171	147	116	70	37	6"	1153	1115	2557	60.3	152
8"	VP63-12	3"-4"牙口		222	207	186	161	126	76	45	8"	1229	1201	2787	65.1	205
8"	VP63-13	3"-4"牙口		240	224	202	174	136	82	45	8"	1305	1201	2863	69.9	210

性能參數



泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	27	40	53	75	80	100	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
8"	VP75-1	3"-4"牙口	H(m)	17	16	15	13	12	10	3.7	4"或6"	472	601	1062	13.4	34
8"	VP75-2	3"-4"牙口		34	31	29	26	21	15	7.5	6"	627	715	1272	19.3	53
8"	VP75-3	3"-4"牙口		51	47	43	38	31	23	11	6"	782	790	1493	25.2	67
8"	VP75-4	3"-4"牙口		68	62	57	51	42	31	15	6"	937	870	1714	31.1	92
8"	VP75-5	3"-4"牙口		86	78	71	64	52	38	18.5	6"	1092	900	1932	37	102
8"	VP75-6	3"-4"牙口		103	94	85	77	62	46	22	6"	1247	944	2153	42.9	112
8"	VP75-7	3"-4"牙口		120	109	99	89	73	54	30	6"	1402	1055	2438	48.8	133
8"	VP75-8	3"-4"牙口		137	125	113	102	83	61	30	6"	1557	1055	2593	54.7	139

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com

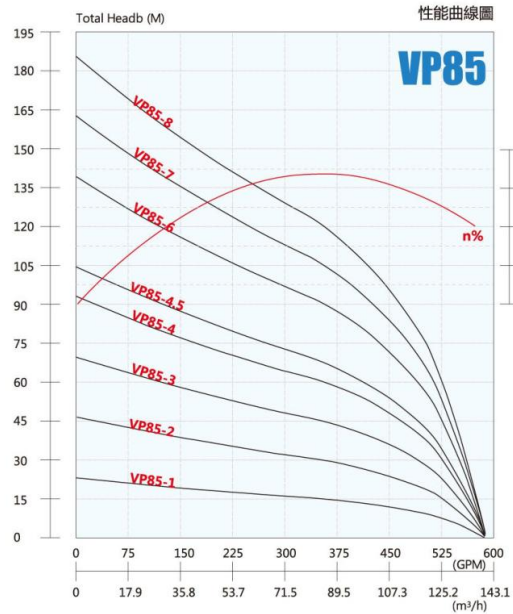

8" 50HZ

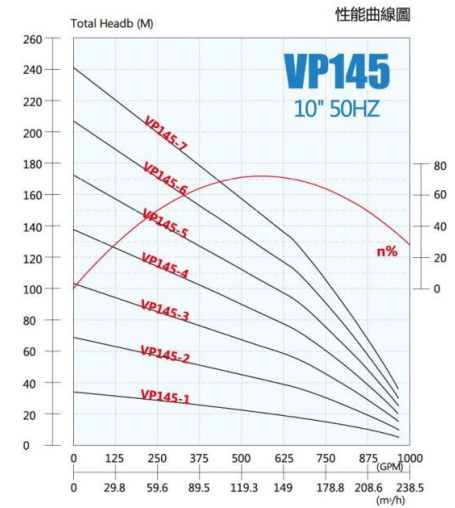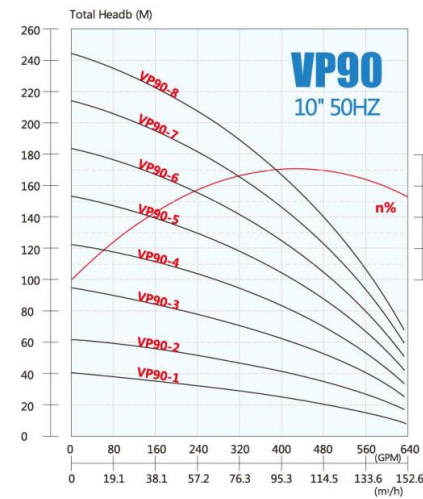

性能參數

泵浦 外徑	配用功率 (KW)	出口	Q (m³/h)	31	46	61	85	92	110	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	C (mm)	重量 (KG)	總重量 (KG)
8"	VP85-1	3"-4"牙口	H(m)	20	18	17	15	14	13	5.5	6"	472	682	1087	13.7	45
8"	VP85-2	3"-4"牙口		39	36	34	31	27	22	11	6"	627	790	1338	19.8	62
8"	VP85-3	3"-4"牙口		59	54	53	46	41	33	15	6"	782	870	1559	26	87
8"	VP85-4	3"-4"牙口		79	72	70	62	54	44	18.5	6"	937	900	1777	32.1	97
8"	VP85-4.5	3"-4"牙口		89	81	78	69	61	49	22	6"	1092	944	1998	38.3	107
8"	VP85-6	3"-4"牙口		118	108	103	92	81	65	30	6"	1247	1055	2283	44.4	128
8"	VP85-7	3"-4"牙口		138	126	120	108	95	76	37	6"	1402	1115	2806	50.6	143
8"	VP85-8	3"-4"牙口		158	144	137	123	108	87	45	8"	1557	1201	3115	56.7	197





性能參數

泵浦 外徑	配用功率 (KW)	出口	最大外徑 mm	Q (m³/h)	36	55	73	90	109	127	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	A重量 (KG)
10"	VP90-1	6"10K法蘭口	204 / 280	H(m)	33	27	24	22	18	14	7.5	6"	693	796	34
10"	VP90-2	6"10K法蘭口			60	53	48	43	36	28	15	6"或8"	859	870	44.2
10"	VP90-3	6"10K法蘭口			87	79	72	63	54	42	22	6"或8"	1025	944	56.8
10"	VP90-4	6"10K法蘭口			115	105	95	84	71	56	30	6"或8"	1191	1055	69.4
10"	VP90-5	6"10K法蘭口			143	130	119	105	89	69	37	6"或8"	1357	1115	82
10"	VP90-6	6"10K法蘭口			171	156	142	126	105	83	45	8"	1523	1201	94.6
10"	VP90-7	6"10K法蘭口			198	182	166	147	124	96	55	8"	1689	1286	107.2
10"	VP90-8	6"10K法蘭口			226	208	189	167	141	110	55	8"	1855	1286	119.8
泵浦 外徑	配用功率 (KW)	出口	最大外徑 mm	Q (m³/h)	51	77	102	145	153	179	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	A重量 (KG)
10"	VP145-1	6"10K法蘭口	204 / 280	H(m)	30	27	24	21	18	13	11	6"或8"	693	790	32
10"	VP145-2	6"10K法蘭口			59	53	47	42	36	27	22	6"或8"	859	944	45
10"	VP145-3	6"10K法蘭口			88	80	71	63	54	40	37	6"或8"	1025	1115	58
10"	VP145-4	6"10K法蘭口			118	106	95	84	72	54	45	8"	1191	1201	71
10"	VP145-5	6"10K法蘭口			147	133	119	105	90	67	55	8"	1357	1286	84
10"	VP145-6	6"10K法蘭口			176	159	142	126	108	81	75	8"	1523	1391	97
10"	VP145-7	6"10K法蘭口			205	186	166	147	126	94	75	8"	1689	1391	110



STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com

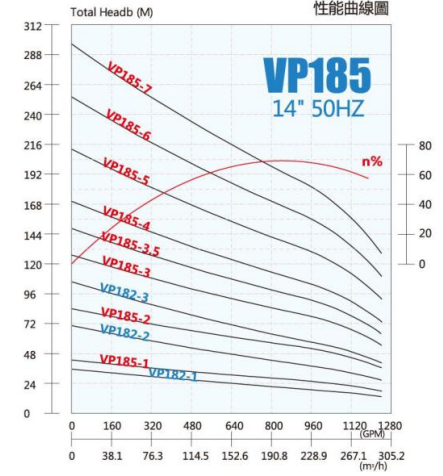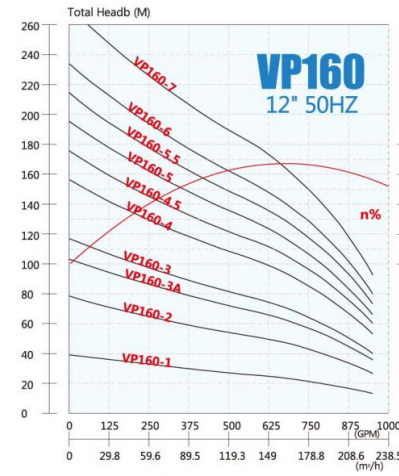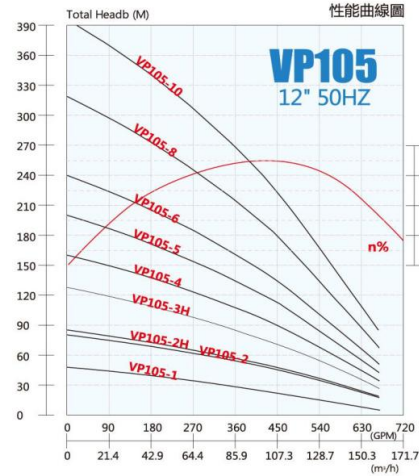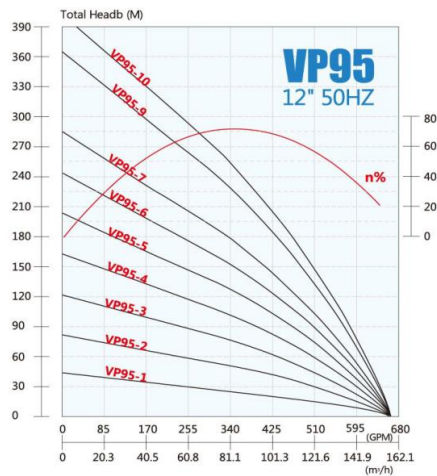

性能參數

泵浦 外徑	配用功率 (KW)	出口	最大外徑 mm	Q (m³/h)	50	66	95	97	112	142	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	A重量 (KG)
12"	VP95-1	6"10K法蘭口	273 / 207	H(m)	34	27	24	20	15	10	7.5	6"	404	796	23.7
12"	VP95-2	6"10K法蘭口			64	56	49	41	32	18	15	6"或8"	486	870	30.2
12"	VP95-3	6"10K法蘭口			94	83	74	62	48	20	22	6"或8"	568	944	36.7
12"	VP95-4	6"10K法蘭口			125	111	98	82	64	30	30	6"或8"	650	1055	43.1
12"	VP95-5	6"10K法蘭口			156	139	123	103	80	42	37	6"或8"	732	1115	49.6
12"	VP95-6	6"10K法蘭口			187	167	147	123	96	52	45	8"	814	1201	56.1
12"	VP95-7	6"10K法蘭口			218	195	172	144	112	56	55	8"	896	1286	62.5
12"	VP95-9	6"10K法蘭口			279	250	221	185	144	74	67	8"	1060	1341	75.4
12"	VP95-10	6"10K法蘭口			310	278	245	206	160	78	75	8"	1142	1391	81.9
12"	VP105-1	6"10K法蘭口	273 / 207	H(m)	36	31	26	21	15	10	9.2	6"	322	856	17.3
12"	VP105-2	6"10K法蘭口			66	57	49	40	30	25	18.5	6"或8"	404	900	24.2
12"	VP105-2H	6"10K法蘭口			71	60	52	42	32	26	22	6"或8"	486	944	31.1
12"	VP105-3H	6"10K法蘭口			105	90	67	63	47	38	30	6"或8"	568	1055	38
12"	VP105-4	6"10K法蘭口			129	114	99	80	60	45	37	6"或8"	650	1115	44.9
12"	VP105-5	6"10K法蘭口			161	143	124	100	75	58	45	8"	732	1201	51.8
12"	VP105-6	6"10K法蘭口			193	171	148	120	90	70	55	8"	814	1286	58.6
12"	VP105-8	6"10K法蘭口			256	228	198	160	120	90	75	8"	978	1391	72.4
12"	VP105-10	6"10K法蘭口			320	285	247	200	150	110	90	8"	1142	1536	86.2



性能參數



泵浦 外徑	配用功率 (KW)	出口	最大外徑 mm	Q (m³/h)	57	85	114	160	170	199	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	A重量 (KG)	
12"	VP160-1	6"10K法蘭口	280 / 227	H(m)	32	32	27	25	21	17	18.5	6"或8"	690	900	37	
12"	VP160-2	6"10K法蘭口			65	61	54	49	43	33	37	6"或8"	864	1115	52	
12"	VP160-3A	6"10K法蘭口			87	80	72	66	56	44	45	8"	1038	1201	67	
12"	VP160-3	6"10K法蘭口			97	91	81	74	64	50	55	8"	1038	1286	67	
12"	VP160-4	6"10K法蘭口			130	120	109	98	85	67	75	8"	1212	1391	82	
12"	VP160-4.5	6"10K法蘭口			146	135	122	111	96	75	75	8"	1386	1391	97	
12"	VP160-5	6"10K法蘭口			162	150	136	123	107	83	90	10"	1386	1430	97	
12"	VP160-5.5	6"10K法蘭口			178	165	149	135	117	92	90	10"	1560	1430	112	
12"	VP160-6	6"10K法蘭口			195	180	163	147	128	100	104	10"	1560	1510	112	
12"	VP160-7	6"10K法蘭口		227	209	190	172	149	117	118	10"	1734	1510	127		
泵浦 外徑	配用功率 (KW)	出口	最大外徑 mm	Q (m³/h)	80	115	152	190	228	268	300	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	A重量 (KG)
14"	VP182-1	6"10K法蘭口	330 / 249	H(m)	29	26	24	21	19	17	15	18.5	6"或8"	702	900	40
14"	VP182-2	6"10K法蘭口			58	53	47	42	38	34	37	6"或8"	876	1115	57	
14"	VP182-3	6"10K法蘭口			86	79	71	64	57	50	55	8"	1050	1286	74	
泵浦 外徑	配用功率 (KW)	出口	最大外徑 mm	Q (m³/h)	80	115	152	190	228	268	300	負載功率 (KW)	接馬達端 美規	A (mm)	B (mm)	A重量 (KG)
14"	VP185-1	6"10K法蘭口	330 / 249	H(m)	36	33	31	28	26	22	18	22	6"或8"	702	944	40
14"	VP185-2	6"10K法蘭口			72	67	62	57	52	45	38	45	8"	876	1201	57
14"	VP185-3	6"10K法蘭口			109	100	93	85	78	67	60	67	8"	1050	1366	74
14"	VP185-3.5	6"10K法蘭口			127	117	108	99	91	78	68	75	8"	1224	1391	91
14"	VP185-4	6"10K法蘭口			145	134	123	113	104	90	75	90	10"	1224	1430	91
14"	VP185-5	6"10K法蘭口			181	167	154	142	130	112	92	110	10"	1398	1510	108
14"	VP185-6	6"10K法蘭口			217	200	185	170	156	134	110	132	10"	1572	1610	125
14"	VP185-7	6"10K法蘭口			253	234	216	198	182	157	132	150	10"	1746	1740	142

注：B為電機長度

STAINLESS STEEL FOUNTAIN PUMP

brown@pudisc.com

14" 50HZ

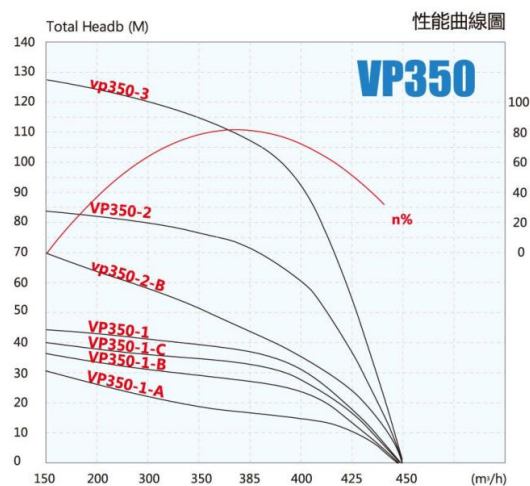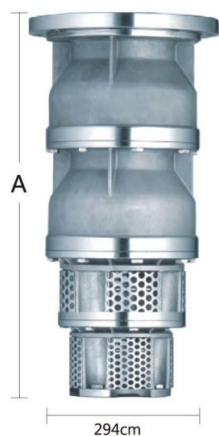

性能參數

泵浦 外徑	型號	出口	250	300	350	385	400	420	負載功率 (KW)	接馬達端 美規	最大外徑 (mm)	A (mm)	A重量 (KG)
14"	VP350-1-A	10"10K法蘭口	25	21	18	15	13	11	30	6"8"	294	497	60
14"	VP350-1-B	10"10K法蘭口	33	31	28	26	25	12	45	8"		497	60
14"	VP350-1-C	10"10K法蘭口	36	34	33	31	29	14	55	8"		497	60
14"	VP350-1	10"10K法蘭口	41	39	37	36	31	19	67	8"		497	60
14"	vp350-2-B	10"10K法蘭口	65	58	51	42	32	24	75	8"		742	110
14"	VP350-2	10"10K法蘭口	81	78	74	71	61	37	125	10"		742	110
14"	vp350-3	10"10K法蘭口	122	117	111	107	92	56	185	10"		987	170

